

Workmates Surface Large Full Spectrum Phase Cut

Designed by FLOS Architectural



28W - 2593lm - 4000K - CRI> 98 - Beam° 71

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
Power (W)	28
System power (W)	28
Source flux (lm)	3146
System flux (lm)	2593

Physical

Color All White

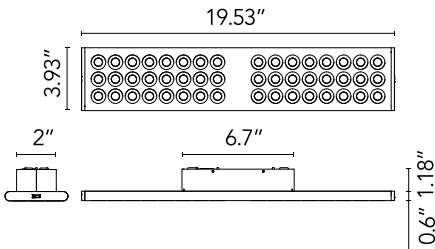

Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

Photometric Files


- LDT / IES [ZIP](#)

Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Photometric

CCT (K)	4000
CRI>	98
Beam angle C0-180 (°)	71
Beam angle C90-270 (°)	82
Extreme cut off	No
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
LED current (mA)	700
Dimmable	Yes
Dimming type	Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)