FLOS

06.2502.CZ Bronze

# Zero Track Surface Profile

Designed by FLOS Architectural, 2018

Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

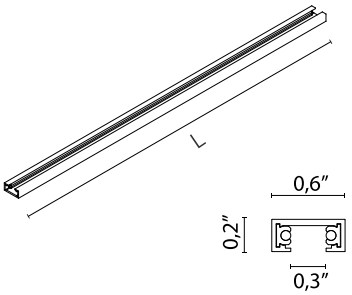


## Main specifications

| | |
|---|---|
| Mounting | Ceiling surface, Wall surface |
| Environments | Indoor dry location |
| Light sources included | no |

## Physical

| | |
|---|---|
| Color | Bronze |
| Trim | No |
| Length (in) | 118.11 |
| Net weight (lb) | 1.37 |
| IP internal | 20 |

## Download

| | |
|---|---|
| Family spec sheet | ZIP |
| Mounting instructions | PDF |

CE UL EAC ENEC UKCA

## Photometric

| | |
|---|---|
| Extreme cut off | No |

## Electrical

| | |
|---|---|
| Insulation class | III |
| Driver | Remote excluded |
| Dimmable | Yes |
| Dimming type | Non Dimmable, Dimmable Casambi |



©2026 Flos - P.IVA 00290820174 - 7/2/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Notes

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90º flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as “T” and “X” shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.
PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.



©2026 Flos - P.IVA 00290820174 - 7/2/2026


In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Accessories & Power Supply

REQUIRED
Power supply

Electrical

LEDSB60W24V-NDM-D01

LED Driver, 24VDC, 60W, Non-Dimming, 120-277V

REQUIRED
Power supply

LEDSB96W24V-NDM-D01

LED Driver, 24VDC, 96W, Non-Dimming, 120-277V

REQUIRED
Profile

06.2509.CZ

Zero Track Surface Profile. End Cap



REQUIRED

06.2540.CZ

Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit

REQUIRED

06.2541.CZ

Zero Track Surface Profile. Feed intermediate connector

OPTIONAL
Accessory

08.0630.14

Stopper

OPTIONAL
Accessory

08.0630.40

Stopper

OPTIONAL

06.2506.14

Zero Track Surface Profile. Intermediate Connector



©2026 Flos - P.IVA 00290820174 - 7/2/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

OPTIONAL

06.2506.40

Zero Track Surface Profile. Intermediate Connector

OPTIONAL
Corner

06.2542.CZ

Zero Track Surface Profile. 90° Flat Corner

OPTIONAL
Corner

06.2543.CZ

Zero Track Surface Profile. Ceiling/wall - wall/wall inner corner

OPTIONAL
Corner

06.2544.CZ

Zero Track Surface Profile. Interior ceiling/ceiling-wall/wall curve



OPTIONAL
Corner

06.2545.CZ

Zero Track Surface Profile. T-shaped connector



OPTIONAL
Corner

06.2546.CZ

Zero Track Surface Profile. Cross-shaped connector



©2026 Flos - P.IVA 00290820174 - 7/2/2026



In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.