

**Non dimmable continuous current power supply
of 220/240V - 50/60Hz with power current
selected through adjustable with DIP-switch 350
mA - 7,3W / 400mA - 8,4W / 450 mA - 9,4W / 500 mA
- 10,5W**



Non dimmable continuous current power supply of 220/240V - 50/60Hz with power current selected through adjustable with DIP-switch 350 mA - 7,35W / 400mA - 8,4W / 450 mA - 9,45W / 500 mA - 10,5W

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	4062172199308
Environments	Indoor dry location
Power (W)	10.5
System power (W)	12.2

Physical

Length (mm)	104
Net weight (kg)	0.06
IP internal	20

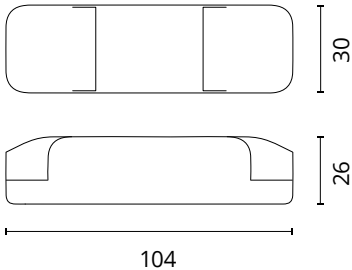

Ecodesign and Energy Labelling

Replaceable control gear by a professional

Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50-60
Main voltage (Vac)	220-240
Driver output voltage (V)	11-21
Forward voltage (V)	11
LED current (mA)	350 / 400 / 450 / 500
Dimmable	No
Power supply type	Non Dimmable
Precabled	No