

# FLOS


FA1051741218 Deep Brown

## Aimer 3 Rgb NEW

Designed by FLOS Outdoor, 2011



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

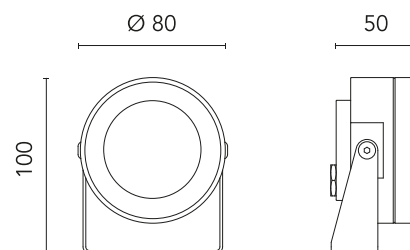

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793608457
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	3
System power (W)	3.4

### Physical

Colour	Deep Brown
Orientation	Directional
Longitudinal tilting (°)	185
Net weight (kg)	0.65
Package height (mm)	75
Package width (mm)	145
Package length (mm)	235
IP internal	67
IP external	66

### Download

[Mounting instructions](#)  ZIP

### Ecodesign and Energy

#### Labelling



Replaceable (LED only) light source by a professional



## Photometric

Light distribution	Symmetric
CCT (K)	RGB
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable DMX
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---

## Accessories & Power Supply



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B10A000

DMX controller; dimmer switch  
for recessed box (60mm hole  
centres)



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair  
with 110 Ohm constant  
impedance



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer  
2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B22A000

Power supply with DMX interface  
for RGB fixtures 36W/220÷240v-  
3CH x 350mA (3CH x 10 x 1W)  
DMX control allowed IP67 Class I  
Selv Eq.



OPTIONAL  
Accessory

FA5130

Visor for Aimer 3



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc  
interface.