



## Almendra Arch Suspension Short 2

Designed by Patricia Urquiola, 2022



32W - 1170lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

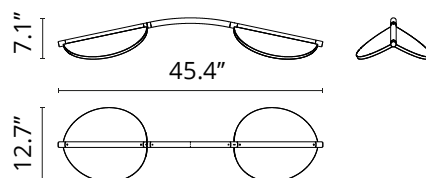

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Edge Lighting       |
| Power (W)              | 32                  |
| System flux (lm)       | 1170                |

### Physical

|                             |           |
|-----------------------------|-----------|
| Color                       | Off-white |
| Length (in)                 | 45.35     |
| Cord color                  | Clear     |
| Cord length (in)            | 110.236   |
| Canopy color                | White     |
| Canopy length/diameter (in) | 16.535    |
| Canopy width (in)           | 3.937     |
| Canopy height (in)          | 1.732     |
| Net weight (lb)             | 12.89     |
| Package volume (in)         | 7297.61   |
| IP internal                 | 20        |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ LDT](#)



|    |
|----|
| IP |
| 20 |

### Photometric

|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| CRI>               | 95        |

### Electrical

|                    |                                          |
|--------------------|------------------------------------------|
| Insulation class   | I                                        |
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| Driver             | Integrated                               |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable                                 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)  
light source by a  
professional

Replaceable control  
gear by a professional

Spare Parts



|     |                                 |           |
|-----|---------------------------------|-----------|
| 00. | Kit with screws and allen key   | RF3160100 |
| 00. | Assembly Almendra Suspension    | RF32514   |
|     | Body White                      |           |
| 00. | Almendra S Arc/Y terminal joint | RF33246   |
|     | L31 White                       |           |



RF3160100

Kit with screws and allen key



RF32514

Assembly Almendra Suspension  
Body White



RF33246

Almendra S Arc/Y terminal joint  
L31 White