

## Almendra Arch Suspension Short 2

Designed by Patricia Urquiola, 2022

32W - 1006lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Edge Lighting       |
| Power (W)              | 32                  |
| System flux (lm)       | 1006                |

### Physical

|                             |                  |
|-----------------------------|------------------|
| Color                       | Lilac Metallized |
| Length (in)                 | 45.35            |
| Cord color                  | Clear            |
| Cord length (in)            | 110.236          |
| Canopy color                | White            |
| Canopy length/diameter (in) | 16.535           |
| Canopy width (in)           | 3.937            |
| Canopy height (in)          | 1.732            |
| Net weight (lb)             | 12.89            |
| Package volume (in)         | 7297.61          |
| IP internal                 | 20               |


### Download

Mounting instructions



### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

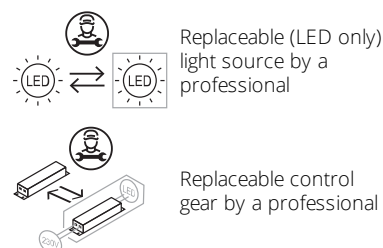



|    |
|----|
| IP |
| 20 |

### Photometric

|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| CRI>               | 95        |

### Electrical

|                    |                                          |
|--------------------|------------------------------------------|
| Insulation class   | I                                        |
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| Driver             | Integrated                               |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable                                 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |

Spare Parts



- |     |                                 |           |
|-----|---------------------------------|-----------|
| 00. | Kit with screws and allen key   | RF3160100 |
| 00. | Almendra S Arc/Y terminal joint | RF33251   |
|     | L31 Met. Violet                 |           |



RF3160100

Kit with screws and allen key



RF33251

Almendra S Arc/Y terminal joint  
L31 Met. Violet