


## Almendra Linear Suspension 4

Designed by Patricia Urquiola, 2022


63W - 1784lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

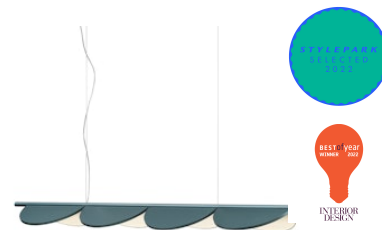

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

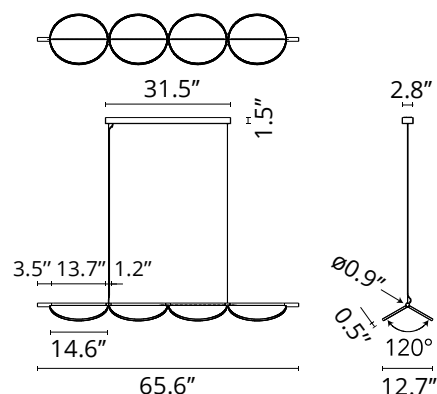

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Edge Lighting       |
| Power (W)              | 63                  |
| System flux (lm)       | 1784                |

### Physical

|                             |                     |
|-----------------------------|---------------------|
| Color                       | Bay Blue Metallized |
| Length (in)                 | 65.55               |
| Cord color                  | Clear               |
| Cord length (in)            | 102.362             |
| Canopy color                | White               |
| Canopy length/diameter (in) | 31.457              |
| Canopy width (in)           | 3.937               |
| Canopy height (in)          | 1.732               |
| Net weight (lb)             | 22.44               |
| Package volume (in)         | 13281.26            |
| IP internal                 | 20                  |

### Download

Mounting instructions



PDF

### Photometric Files

LDT / IES



LDT



|    |
|----|
| IP |
| 20 |

## Photometric


|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| CRI>               | 95        |

## Electrical


|                    |                                          |
|--------------------|------------------------------------------|
| Insulation class   | I                                        |
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| Driver             | Integrated                               |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable                                 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |
| Batteries inside   | No                                       |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts



|     |                                                                       |           |
|-----|-----------------------------------------------------------------------|-----------|
| 04. | Terminal Joint L90 Almendra Bay Blue Metallized                       | RF32777   |
| 05. | Assembly Almendra Suspension Wiring & Connections Bay Blue Metallized | RF32534   |
| 06. | Assembly Almendra Suspension Central Feed Bay Blue Metallized         | RF32525   |
| 07. | Assembly Almendra Suspension Wiring Bay Blue Metallized               | RF32573   |
| 08. | Assembly Almendra Suspension Body Bay Blue Metallized                 | RF32518   |
| 09. | Kit with screws and allen key                                         | RF3160100 |




RF32777

Terminal Joint L90 Almendra Bay  
Blue Metallized



RF32534

Assembly Almendra Suspension  
Wiring & Connections Bay Blue  
Metallized



RF32525

Assembly Almendra Suspension  
Central Feed Bay Blue Metallized



RF32573

Assembly Almendra Suspension  
Wiring Bay Blue Metallized



RF32518

Assembly Almendra Suspension  
Body Bay Blue Metallized



RF3160100

Kit with screws and allen key