
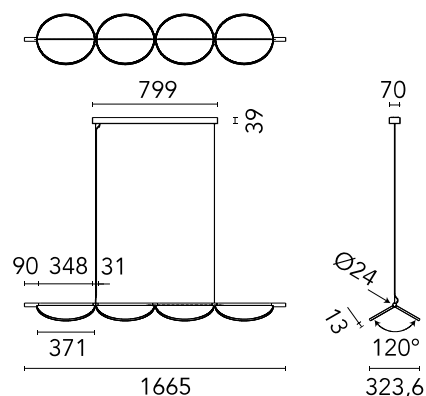


Almendra Linear Suspension 4 Primer

Designed by Patricia Urquiola, 2022

60W - 1784lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

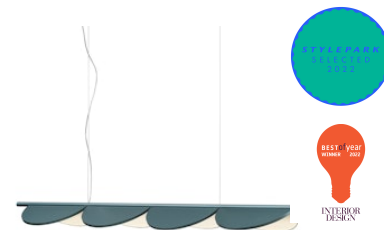

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607050781
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	1784

Physical

Colour	Bay Blue Metallized
Length (mm)	1665
Cord colour	Clear
Cord length (mm)	2600
Canopy colour	Primer
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

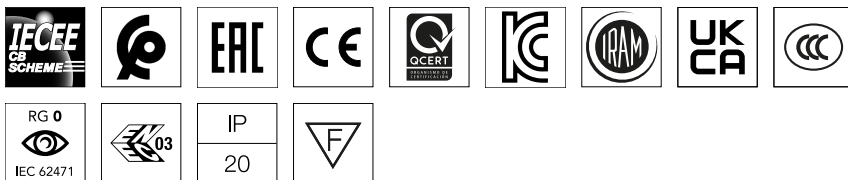

Schematic light drawing

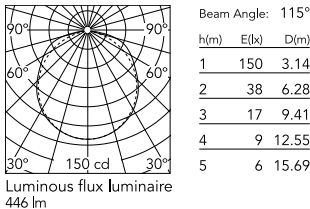

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

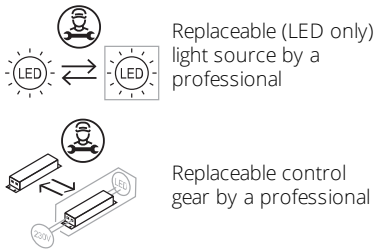

Spare Parts

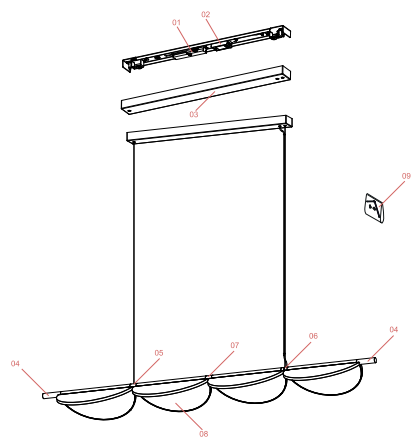

01.	Driver 96W 48V 220-240V	RF32405
02.	Led dimmer kit	RF34197
04.	Terminal Joint L90 Almendra Bay Blue Metallized	RF32777
05.	Assembly Almendra Suspension Wiring & Connections Bay Blue Metallized	RF32534
06.	Assembly Almendra Suspension Central Feed Bay Blue Metallized	RF32525
07.	Assembly Almendra Suspension Wiring Bay Blue Metallized	RF32573
08.	Assembly Almendra Suspension Body Bay Blue Metallized	RF32518
09.	Kit with screws and allen key	RF3160100

FLOS

RF32405

Driver 96W 48V 220-240V



RF34197

Led dimmer kit



RF32777

Terminal Joint L90 Almendra Bay
Blue Metallized

FLOS

RF32534

Assembly Almendra Suspension
Wiring & Connections Bay Blue
Metallized

FLOS

RF32525

Assembly Almendra Suspension
Central Feed Bay Blue Metallized

FLOS

RF32573

Assembly Almendra Suspension
Wiring Bay Blue Metallized

FLOS

RF32518

Assembly Almendra Suspension
Body Bay Blue Metallized



RF3160100

Kit with screws and allen key