

## Almendra Linear Suspension 4 Primer


Designed by Patricia Urquiola, 2022

63W - 1828lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

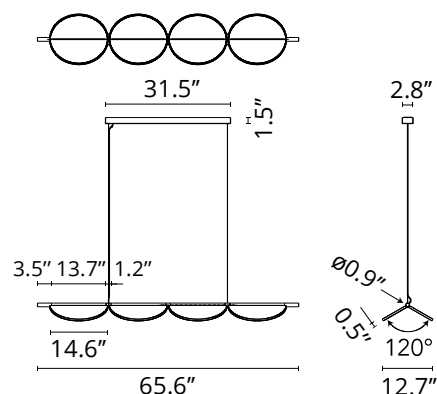

## Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Edge Lighting       |
| Power (W)              | 63                  |
| System flux (lm)       | 1828                |

## Physical

|                             |          |
|-----------------------------|----------|
| Color                       | Nude     |
| Length (in)                 | 65.55    |
| Cord color                  | Clear    |
| Cord length (in)            | 102.362  |
| Canopy color                | Primer   |
| Canopy length/diameter (in) | 31.457   |
| Canopy width (in)           | 3.937    |
| Canopy height (in)          | 1.732    |
| Net weight (lb)             | 22.44    |
| Package volume (in)         | 13281.26 |
| IP internal                 | 20       |

## Download

## Mounting instructions



## Photometric Files

LDT / IES





|    |
|----|
| IP |
| 20 |

### Photometric


|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| CRI>               | 95        |

### Electrical

|                    |                                          |
|--------------------|------------------------------------------|
| Insulation class   | I                                        |
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| Driver             | Integrated                               |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable                                 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |
| Batteries inside   | No                                       |

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

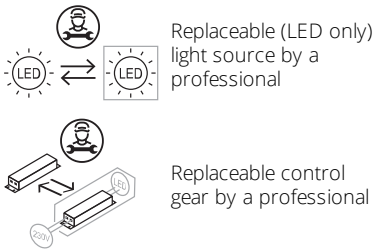


Spare Parts



|     |                                                           |           |
|-----|-----------------------------------------------------------|-----------|
| 04. | Terminal Joint L90 Almendra<br>Nude                       | RF32775   |
| 05. | Assembly Almendra Suspension<br>Wiring & Connections Nude | RF32532   |
| 06. | Assembly Almendra Suspension<br>Central Feed Nude         | RF32523   |
| 07. | Assembly Almendra Suspension<br>Wiring Nude               | RF32571   |
| 08. | Assembly Almendra Suspension<br>Body Nude                 | RF32516   |
| 09. | Kit with screws and allen key                             | RF3160100 |



RF32775  
Terminal Joint L90 Almendra  
Nude



RF32532  
Assembly Almendra Suspension  
Wiring & Connections Nude



RF32523  
Assembly Almendra Suspension  
Central Feed Nude



RF32571  
Assembly Almendra Suspension  
Wiring Nude



RF32516  
Assembly Almendra Suspension  
Body Nude



RF3160100  
Kit with screws and allen key