

# FLOS


FU039333 Anthracite

## Almendra Linear Suspension 6 Primer

Designed by Patricia Urquiola, 2022

95W - 2706lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

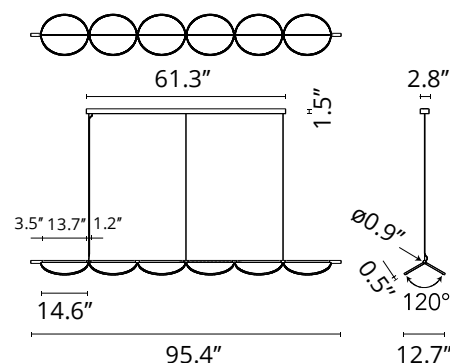

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Edge Lighting       |
| Power (W)              | 95                  |
| System flux (lm)       | 2706                |

### Physical

|                             |            |
|-----------------------------|------------|
| Color                       | Anthracite |
| Length (in)                 | 95.39      |
| Cord color                  | Clear      |
| Cord length (in)            | 90.551     |
| Canopy length/diameter (in) | 61.299     |
| Canopy width (in)           | 3.937      |
| Canopy height (in)          | 1.732      |
| Net weight (lb)             | 34.35      |
| Package volume (in)         | 18907.06   |
| IP internal                 | 20         |

### Download

Mounting instructions  PDF

### Photometric Files

LDT / IES  LDT



Photometric


|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| CRI>               | 95        |

Electrical

|                    |  |
|--------------------|--|
| Insulation class   | I  |
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| Driver             | Integrated                               |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable                                 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |
| Batteries inside   | No                                       |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

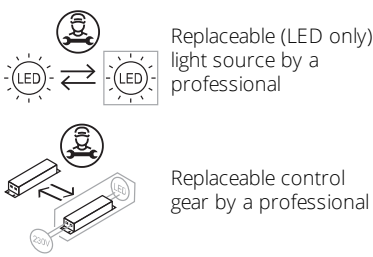

Spare Parts



|     |   |           |
|-----|---|-----------|
| 04. | Terminal Joint L90 Almendra Anthracite                      | RF32776   |
| 05. | Assembly Almendra Suspension Wiring & Connections Athracite | RF32533   |
| 06. | Assembly Almendra Suspension Central Feed Anthracite        | RF32524   |
| 07. | Assembly Almendra Suspension Wiring Athracite               | RF32572   |
| 08. | Assembly Almendra Suspension Body Anthracite                | RF32517   |
| 09. | Kit with screws and allen key                               | RF3160100 |



RF32776  
Terminal Joint L90 Almendra  
Anthracite




RF32533  
Assembly Almendra Suspension  
Wiring & Connections Athracite



RF32524  
Assembly Almendra Suspension  
Central Feed Anthracite



RF32572  
Assembly Almendra Suspension  
Wiring Athracite



RF32517  
Assembly Almendra Suspension  
Body Anthracite



RF3160100  
Kit with screws and allen key