


# FLOS

F0442039 Bay Blue Metallized

## Almendra Organic Suspension Short 2 NEW

Designed by Patricia Urquiola, 2022

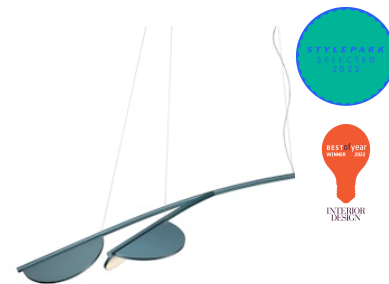


30W - 892lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

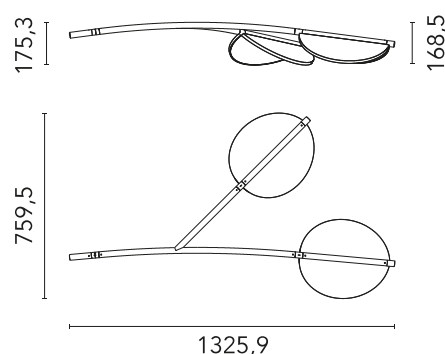

### Main specifications

EAN	8059607048641
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	Edge Lighting
Power (W)	30
System flux (lm)	892

### Physical

Colour	Bay Blue Metallized
Length (mm)	1326
Cord colour	Clear
Cord length (mm)	2600
Canopy colour	White
Canopy dimension (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	8.17
Package volume (m3)	0.21
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ LDT](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

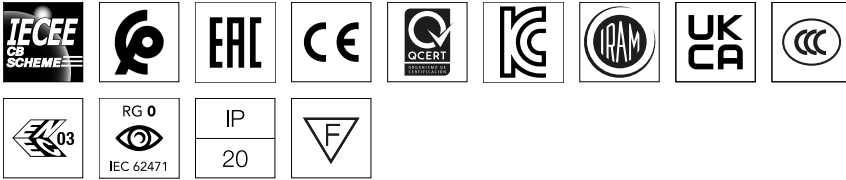

## Schematic light drawing



## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Non-replaceable light source




Replaceable control gear by a professional

## Spare Parts




- |     |   |         |
|-----|---|---------|
| 00. | Driver 96W 48V 220-240V                         | RF32405 |
| 00. | Assembly Almendra S Body Bay<br>Blue Metallized | RF32518 |



RF32405

Driver 96W 48V 220-240V



RF32518

Assembly Almendra S Body Bay  
Blue Metallized