


Almendra Organic Suspension Short 3 Primer

Designed by Patricia Urquiola, 2022

48W - 1755lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

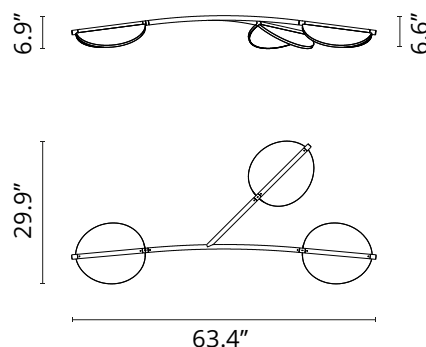

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	48
System flux (lm)	1755

Physical

Color	Off-white
Length (in)	63.42
Cord color	Clear
Cord length (in)	102.362
Canopy color	Primer
Canopy length/diameter (in)	31.457
Canopy width (in)	3.937
Canopy height (in)	1.732
Net weight (lb)	21.67
Package volume (in)	15138.65
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)



IP
20

Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



00.	Kit with screws and allen key	RF3160100
00.	Assembly Almendra Suspension	RF32514
	Body White	
00.	Almendra S Arc/Y terminal joint	RF33246
	L31 White	



RF3160100

Kit with screws and allen key



RF32514

Assembly Almendra Suspension
Body White



RF33246

Almendra S Arc/Y terminal joint
L31 White