

# FLOS


FA10517414457 Polished Stainless Steel

## Aqua Aimer 3 Rgb NEW

Designed by FLOS Outdoor, 2011



RGB LED source included. 316L stainless steel body and bracket, suitable for submersion. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 5000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. Fixing bracket included. The metal nail for ground installation needs to be ordered separately.

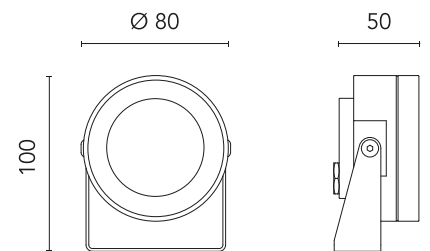

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793608495
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	3
System power (W)	3.4

### Physical

Colour	Polished Stainless Steel
Orientation	Directional
Net weight (kg)	0.65
Package height (mm)	75
Package width (mm)	145
Package length (mm)	235
IP internal	68
IP external	66

### Download

[Mounting instructions](#)

[ZIP](#)

### Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



<https://professional.flos.com/en/global/product/aqua-aimer-3-rgb-fa10517414457/>

FA10517414457

©2022 Flos - P.IVA 00290820174 - 8/28/2025

[professional.flos.com](https://professional.flos.com) | [flos.outdoor@flos.com](mailto:flos.outdoor@flos.com) 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Photometric

Light distribution	Symmetric
CCT (K)	RGB
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable DMX
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B10A000

DMX controller; dimmer switch  
for recessed box (60mm hole  
centres)



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair  
with 110 Ohm constant  
impedance



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer  
2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B22A000

Power supply with DMX interface  
for RGB fixtures 36W/220÷240v-  
3CH x 350mA (3CH x 10 x 1W)  
DMX control allowed IP67 Class I  
Selv Eq.



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc  
interface.