



F1084064 Bright Aluminium

Bellhop Glass S1

Designed by Edward Barber and Jay Osgerby, 2025



LED retrofit - 30W

Bellhop Glass Suspension can be used it as an ambient but also as a task light, which directly illuminates, with a non-blinding cone of light, the surface on which it is suspended. The hole in the bottom part of the lamp, protected by an aluminum element, is shaped to direct the light (and change the bulb) avoiding the diffusion up to the eyes of those sitting at the table. A cone of light is therefore created inside the suspended Bellhop Glass, which expands homogeneously in the environment on all sides and lands on the table precisely, like a torch, visually signaled by the colored aluminum ring that surrounds the lower opening of the lamp.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

| EAN | 8059607073797 |
|------------------------|---------------------|
| Mounting | Suspension |
| Environments | Indoor dry location |
| Light source type | Bulb |
| Light sources included | No |
| Lamp category | LED retrofit |
| Lamp type | А |
| Lamp holders | E27 |
| Ilcos | HSGSA |
| Number of lamps | 1 |
| Power (W) | 30 |
| System power (W) | 30 |

Physical

| Colour | Bright Aluminium |
|--------------------------------|------------------|
| Length (mm) | 330 |
| Cord length (mm) | 2700 |
| Canopy colour | White |
| Canopy length/diameter (mm) | 132 |
| Canopy height (mm) | 31 |
| Net weight (kg) | 3.1 |
| Package volume (m3) | 0.07 |
| IP internal | 20 |



| _ | |
|------|------|
| Down | load |

| Mounting instructions | <u>↓</u> PDF |
|-----------------------|--------------|
| Mounting instructions | ⊥ PDF |
| Mounting instructions | 业 PDF |

Photometric Files

LDT / IES

J. ZIP

Technical Drawings

| 2D | ₹ ZIP |
|----|--------------|
| 3D | ⊥ ZIP |
| | |

Ecodesign and Energy Labelling



Replaceable (LED only) light source by an enduser

https://professional.flos.com/en/global/product/bellhop-glass-s1-f1084064/

F1084064















Schematic light drawing



| Beam Angle: - 73° | | |
|-------------------|-------|------|
| h(m) | E(lx) | D(m) |
| 1 | 878 | 1.48 |
| 2 | 219 | 2.97 |
| 3 | 98 | 4.45 |
| 4 | 55 | 5.94 |
| 5 | 35 | 7.42 |


Luminous flux luminaire 3400 lm

Photometric

| Lighting type | Total |
|--------------------|-----------|
| Light distribution | Symmetric |
| Extreme cut off | No |

Electrical

| Insulation class | I |
|--------------------|---|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-250 |
| Dimmable | Yes |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Batteries inside | No |




NOT INCLUDED

RF36503

LED 25W E27 3700lm 2700K 240° DIMMER

Spare Parts

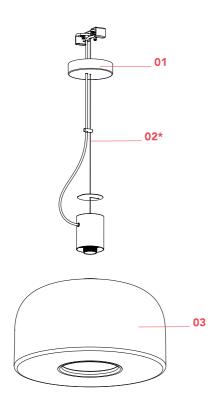

*To be replaced only by authorised service centres or qualified professionals.

D1. Bellhop Glass S shiny white RF1081109 ceiling rose assembly

02. Steel cable 3 meters RF36887

Belhop Glass S1 diffuser white

diffuser shiny ring







RF1081109

Bellhop Glass S shiny white ceiling rose assembly

RF36887

Steel cable 3 meters

F1086064

Belhop Glass S1 diffuser white diffuser shiny ring