



# **Bellhop Glass S2**

Designed by Edward Barber and Jay Osgerby, 2025



LED retrofit - 30W

Bellhop Glass Suspension can be used it as an ambient but also as a task light, which directly illuminates, with a non-blinding cone of light, the surface on which it is suspended. The hole in the bottom part of the lamp, protected by an aluminum element, is shaped to direct the light (and change the bulb) avoiding the diffusion up to the eyes of those sitting at the table. A cone of light is therefore created inside the suspended Bellhop Glass, which expands homogeneously in the environment on all sides and lands on the table precisely, like a torch, visually signaled by the colored aluminum ring that surrounds the lower opening of the lamp.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

# Main specifications

EAN	8059607068113
Mounting	Suspension
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	LED retrofit
Lamp holders	E27
Ilcos	HSGSA
Number of lamps	1
Power (W)	30
System power (W)	30

#### **Physical**

Colour	White
Orientation	Fixed
Length (mm)	450
Cord colour	Grey
Cord length (mm)	2700
Canopy colour	White
Canopy length/diameter (mm)	132
Canopy height (mm)	31
Net weight (kg)	7.2
Package volume (m3)	0.14
IP internal	20



### Download

Mounting instructions	<b>₹</b> PDF
Mounting instructions	<b>⊥</b> PDF

### Photometric Files

LDT / IES



### **Technical Drawings**

2D	<b>⊥</b> ZIP
3D	<b>⊥</b> ZIP

# Ecodesign and Energy Labelling





Replaceable (LED only) light source by an end-user

https://professional.flos.com/en/global/product/bellhop-glass-s2-f1081009/

F1081009













## Schematic light drawing



Beam Angle: - 60°		
h(m)	E(lx)	D(m)
1	927	1.15
2	232	2.30
3	103	3.45
4	58	4.60
_	27	F 7F


Luminous flux luminaire 3660 lm

### Photometric

Lighting type	Total
Light distribution	Symmetric
Extreme cut off	No

### Electrical

Insulation class	I	
Frequency (Hz)	50/60	
Main voltage (Vac)	220-240	
Dimmable	Yes	
Dimming interface	Remote Dimmable (Dimmer Not Included)	
Batteries inside	No	




**NOT INCLUDED** 

RF36503

LED 25W E27 3700lm 2700K 240° DIMMER

### **Spare Parts**

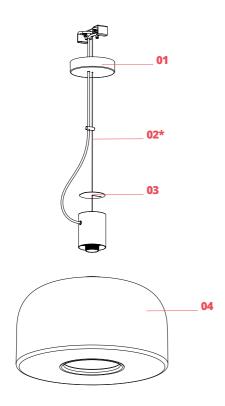

\*To be replaced only by authorised service cemes or qualified professionals.

D1. Bellhop Glass S shiny white RF1081109
ceiling rose assembly
D2. Steel cable 3 meters RF36887

Bellhop Glass S2 white diffuser

white ring









RF1081109

Bellhop Glass S shiny white ceiling rose assembly

Steel cable 3 meters

Bellhop Glass S2 white diffuser white ring