

FLOS



F1530030 Anthracite/Black Marble


Captain Flint

Designed by Michael Anastassiades, 2015

20W - 554lm - 2700K



Sleek and graceful, Captain Flint is a versatile floor lamp features smart details from head to toe. Designed in 2015 by Michael Anastassiades, this dual purpose floor lamp converts either to a reading or ambient light. Discover the Captain Flint outdoor/indoor version, see here. Lamp Features: At the top, its spinning cone diffuser provides direct light that can be repositioned. On the base of this dimmable floor lamp, it is weighted by a stunning Italian white Carrara or black Marquina marble base which added a feeling of understated luxury. Its stem and cone are available in painted steel or brushed brass. The diffuser is opal photoengraved PC. Its power cord measures 102" long (260 cm) and features an ON-OFF foot dimmer switch. Dimming option: The light of this sleek floor lamp can be adjusted from 10-100%. The plug-in power supply includes with interchangeable plugs. This version is suitable for indoor use only. Inspiration behind the design: There's a duality to this finely balanced piece from designer Michael Anastassiades. "I wanted to design a light that was dual purpose," he says. "It is an up lighter, illuminating the space with ambient lighting, and its rotation also offers a dim companion for reading. There's a notion of balance, with a cone resting delicately on its point on a rotating rod."



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| EAN | 8059607001431 |
| Mounting | Floor |
| Environments | Indoor dry location |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Power (W) | 20 |
| System flux (lm) | 554 |

Physical

| | |
|---------------------|-------------------------|
| Color | Anthracite/Black Marble |
| Length (in) | 12.6 |
| Cord color | Black |
| Cord length (in) | 98.425 |
| Net weight (lb) | 18.08 |
| Package volume (in) | 13620.55 |
| IP internal | 20 |

Download

[Mounting instructions](#) PDF

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) LDT


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Luminous flux luminaire
1059 lm

Photometric


| | |
|--------------------|----------------|
| Lighting type | Direct |
| Light distribution | Roto symmetric |
| CCT (K) | 2700 |
| Extreme cut off | No |

Electrical


| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Driver | Remote included |
| Dimmable | Yes |
| Dimming type | Electronic 48V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

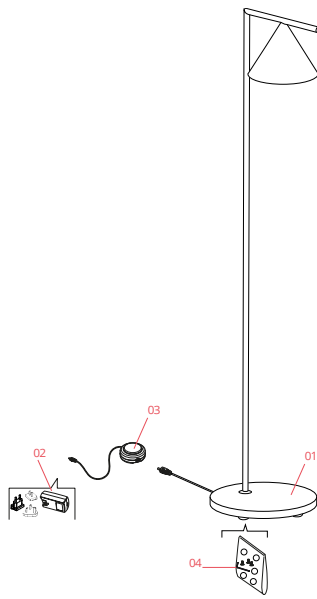

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Black marble base | F1532030 |
| 02. | Black plug assembly kit & 48V driver | RF6600130 |
| 03. | Switch dimmer 400Ma | RF26382 |
| 04. | Screws with allen key and feet pads | RF1530100 |



F1532030

Black marble base



RF6600130

Black plug assembly kit & 48V driver



RF26382

Switch dimmer 400Ma



RF1530100

Screws with allen key and feet pads