

# FLOS

■ F011D30BU30 Black

## Captain Flint Outdoor B1

Designed by Michael Anastassiades, 2015

652lm - 3000K - CRI> 80 - Beam° 112



Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793215365        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light Source Type      | LED                  |
| Light sources included | Yes                  |
| LED type               | LED array            |
| Number of lamps        | 1                    |
| System power (W)       | 9.5                  |
| Source flux (lm)       | 1026                 |
| System flux (lm)       | 652                  |

### Physical

|                         |            |
|-------------------------|------------|
| Color                   | Black      |
| Orientation             | Adjustable |
| Transversal tilting (°) | 270        |
| Net weight (lb)         | 4.92       |
| Package height (in)     | 42.13      |
| Package width (in)      | 18.11      |
| Package length (in)     | 12.6       |
| Package volume (in)     | 9611.52    |
| IP internal             | 65         |




### Download


Family spec sheet [ZIP](#)  
Mounting instructions [ZIP](#)

### Photometric Files


LDT / IES [ZIP](#)



### Ecodesign and Energy Labelling

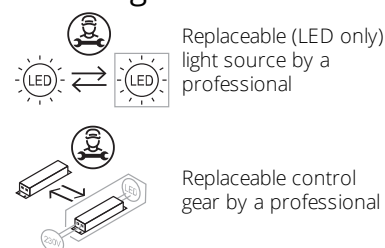

Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 112       |
| Beam angle C90-270 (°) | 112       |
| Extreme cut off        | No        |

Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | II                |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 110-127           |
| Driver             | Integrated        |
| Dimmable           | Yes               |
| Dimming interface  | Dimmer Integrated |

Accessories & Power Supply



REQUIRED  
Accessory

F018Z000000

Box for ground installation