

FLOS

 F011D40BU30 Black

Captain Flint Outdoor B1

Designed by Michael Anastassiades, 2015

699lm - 4000K - CRI> 80 - Beam° 112



Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793215617
Mounting	Ground
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
System power (W)	9.5
Source flux (lm)	1099
System flux (lm)	699

Physical

Color	Black
Orientation	Adjustable
Transversal tilting (°)	270
Net weight (lb)	4.92
Package height (in)	12.6
Package width (in)	42.13
Package length (in)	18.11
Package volume (in)	9611.52
IP internal	65




Download


Family spec sheet [ZIP](#)
Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)



Ecodesign and Energy Labelling

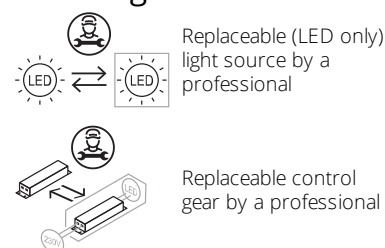

<https://professional.flos.com/en-US/us/product/captain-flint-outdoor-b1-f011d40bu30/>


F011D40BU30

©2022 Flos - P.IVA 00290820174 - 8/2/2025

professional.flos.com | flos.outdoor@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	110-127
Driver	Integrated
Dimmable	Yes
Dimming interface	Dimmer Integrated

Accessories & Power Supply



REQUIRED
Accessory

F018Z000000

Box for ground installation