


# FLOS


■ F011W40AU30 Black

## Captain Flint Outdoor W1

Designed by Michael Anastassiades, 2015

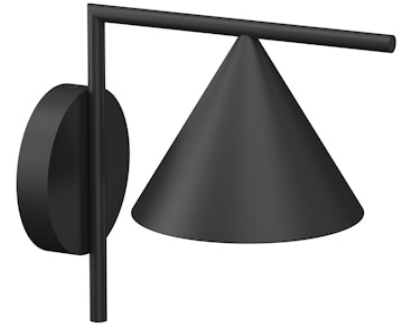

The Captain Flint family expands with a new wall feature. The classic floor lamp by Michael Anastassiades is presented in a new configuration for exterior and interior walls yet preserves the compact perfection of the cone diffuser. The new wall version completes the collection, ensuring the same appeal in new installation capabilities. Available in Black, Gold, Stainless Steel, Deep Brown, Red Burgundy finish. Inspiration behind the design: I wanted to design a light that had a dual purpose. To be an uplighter illuminating the space with enough ambient lighting, while at the same time to be rotated and directed down; to become a dim companion for reading. The notion of balance is prominent in this fixture, a cone resting delicately on its point on a rotating horizontal metal rod. The base is in marble or stone, bringing an element of preciousness, stability and presence. - Michael Anastassiades Discover the indoor version of Captain Flint, see here.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793217444
Mounting	Wall
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
System power (W)	9.5
Source flux (lm)	1211
System flux (lm)	703

### Physical

Color	Black
Trim	No
Orientation	Fixed
Length (in)	13.23
Net weight (lb)	4.63
Package height (in)	10.12
Package width (in)	15.98
Package length (in)	15.98
Package volume (in)	2585.16
IP internal	65

### Download

Family spec sheet [↓ ZIP](#)  
Mounting instructions [↓ ZIP](#)


### Photometric Files

LDT / IES [↓ ZIP](#)


### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

## Schematic light drawing



Beam Angle: 112°

h(m)	E(lx)	D(m)
1	249	2.95
2	62	5.91
3	28	8.86
4	16	11.81
5	10	14.76

### Photometric

Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112
Extreme cut off	No

### Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	110-277
Driver	Integrated
Precabled	NO
Emergency type	No
Batteries inside	No

### Notes

110V version upon request.