

FLOS

60.9387

Continuous current power supply 18W, 100/277V - 50/60Hz with power current selected through adjustable switch. Non Dimmable.



Output current: 1050mA - 30/38W (100-110V / 120-277V) / 1000mA - 30/38W (100-110V / 120-277V) / 950mA - 30/38W (100-110V / 120-277V) / 900mA - 30/38W (100-110V / 120-277V) / 850mA - 30/35W (100-110V / 120-277V) / 800mA - 30/33W (100-110V / 120-277V) / 750mA - 30/32W (100-110V / 120-277V) / 700mA - 30/31W (100-110V / 120-277V) / 650mA - 29W / 600mA - 27W / 550mA - 24W / 500mA - 22W / 450mA - 20W / 400mA - 18W / 350mA - 15W / 300mA - 13W.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications



Power (W) 38

Physical


Length (mm) 147

Net weight (kg) 0.12

IP internal 20

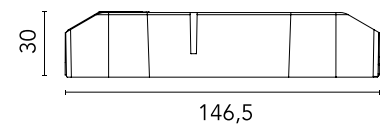

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50-60
Main voltage (Vac)	100-277
Driver output voltage (V)	300 / 350 / 400 / 450 / 500 / 550 / 600 / 650 / 700mA - 10-45V / 750mA - 10-44V / 800 / 850 / 900mA - 10-42V / 950mA - 10-40V / 1000mA - 10-38V / 1050mA - 10-36V
Power supply	Remote
Dimmable	No
Precabled	No
Emergency	Yes

Notes

Consult features for use at 100-110V
