

FLOS

60.7744

Continuous current supply source of 220-240V - 50/60Hz - 350mA 4,5W - 500mA 6,5W - 600mA 7,5W - 700mA 9W selectable by switch, dimmable Dali 2 & Push



Input: 220–240V, 50/60Hz Output: Constant current, selectable via integrated switch
• 350mA / 4,5W • 500mA / 6,5W • 600mA / 7,5W • 700mA / 9W Control: DALI 2 & PUSH dimmable

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Light sources included	No
Power (W)	9

Physical

Net weight (kg)	0.56
IP internal	20

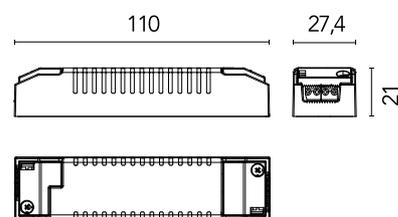

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Driver output voltage (V)	6-13
Forward voltage (V)	13
LED current (mA)	350/500/600/700
Power supply	Remote
Dimmable	Yes
Power supply type	Dimmable DALI 2, Dimmable Push
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No
Batteries inside	No