


## Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020



157W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 1 ceiling models C4. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration must include its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607038277
Mounting	Ceiling
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	157
Lumen Output (lm)	8830

### Physical

Colour	Argent
Length (mm)	1770
Net weight (kg)	8.1
Package volume (m3)	0.07
IP internal	20

### Download

Mounting instructions [Download PDF](#)


### Photometric Files

ULD [Download ZIP](#)

### Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

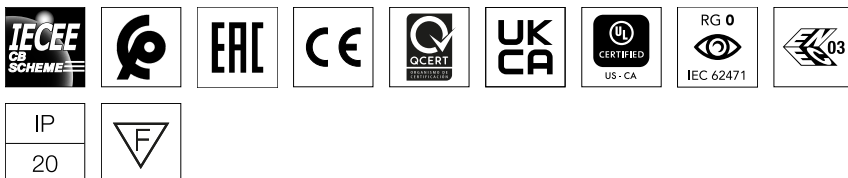

### Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

### Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Spare Parts


01.

Led dimmer kit

RF0410300
02.

Coordinates Rod Assembly

RF30918
- L1760 H-10 Argent

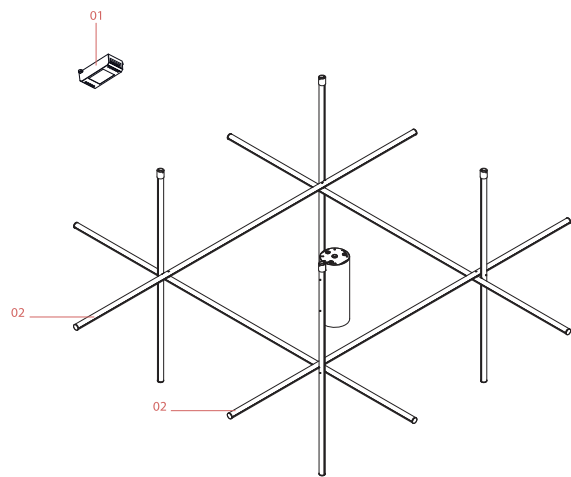



RF0410300  
Led dimmer kit



RF30918  
Coordinates Rod Assembly  
L1760 H-10 Argent