



F1856044 Anodized Champagne

Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020



157W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. Each element is made of extruded anodized aluminum with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the three ceiling models (C1 – C2 – C4), which may be combined with the respective Long versions for high ceilings (C1 Long, C2 Long, C4 Long). The ' Module C' is also available for large-scale installations Available in two finishes: Champagne and Argent Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by Sã o Paolobased architect Isay Weinfeld.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607001684	
Mounting	Ceiling	
Environments	Indoor dry location	
Light Source Type	LED	
Light sources included	Yes	
LED type	LED Module	
Power (W)	157	
System flux (lm)	8830	

Physical

Color	Anodized Champagne	
Length (in)	69.68	
Net weight (lb)	17.86	
Package volume (in)	4079.57	
IP internal	20	



Download Mounting instructions	⊥ PDF
Photometric Files	⊥ ZIP
Technical Drawings 3D	⊥ ZIP

https://professional.flos.com/en-US/us/product/coordinates-ceiling-4-f1856044/

F1856044





















Photometric

Lighting type	pe Total	
Light distribution	Asymmetric	
CCT (K)	2700	
CRI>	95	
Extreme cut off	No	

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **F**




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

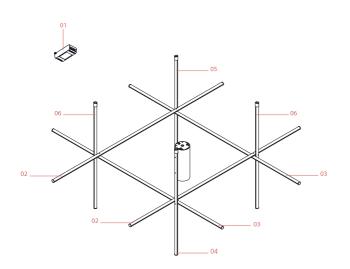

01.	Led dimmer kit	RF0410300
02.	Coordinates Rod Assembly	RF30984
	L1760 H-10 Anodized	
	Champagne	
03.	Coordinates Rod Assembly	RF30985
	L1760 H-11 Anodized	
	Champagne	
04.	Coordinates Ceiling 4 Rod	RF30991
	Assembly L920 CA-07 Anodized	
	Champagne	
06.	Rod Assembly L920 C-09	RF30993
	Anodized Champagne	



FLOS

RF0410300

Led dimmer kit

RF30984

Coordinates Rod Assembly L1760 H-10 Anodized Champagne RF30985

Coordinates Rod Assembly L1760 H-11 Anodized Champagne RF30991

Coordinates Ceiling 4 Rod Assembly L920 CA-07 Anodized Champagne



RF30993

Rod Assembly L920 C-09 Anodized Champagne