


Coordinates Module Suspension CLIII

Designed by Michael Anastassiades, 2020

180W - 10230lm - 2700K - CRI> 90

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

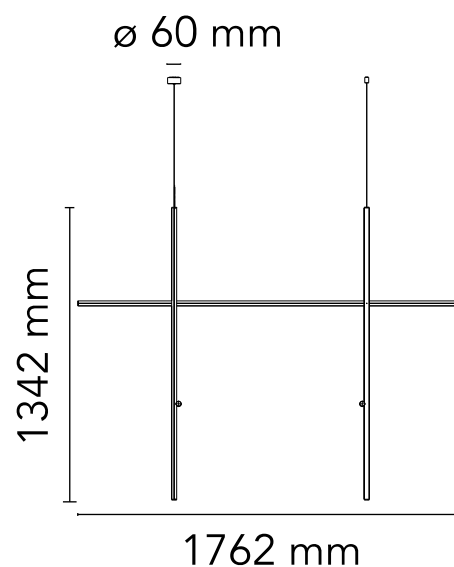

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607031162
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	180
Lumen Output (lm)	10230

Physical

Colour	Anodized Champagne
Length (mm)	1770
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	6
Package volume (m3)	0.05
IP internal	20

Download

Mounting instructions [↓ PDF](#)


Photometric Files

ULD [↓ ZIP](#)

Technical Drawings

3D [↓ ZIP](#)

 Bim [↓ ZIP](#)

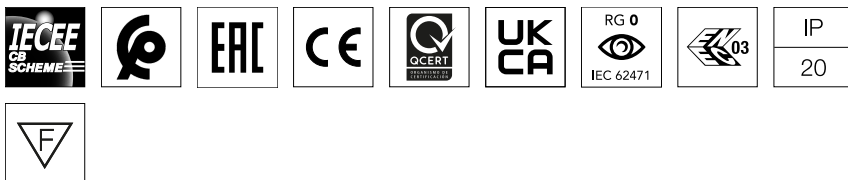

Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



OPTIONAL

RF27617

48Vdc 240W Power supply




OPTIONAL

RF26994

12-48V Led Dimmer

Spare Parts

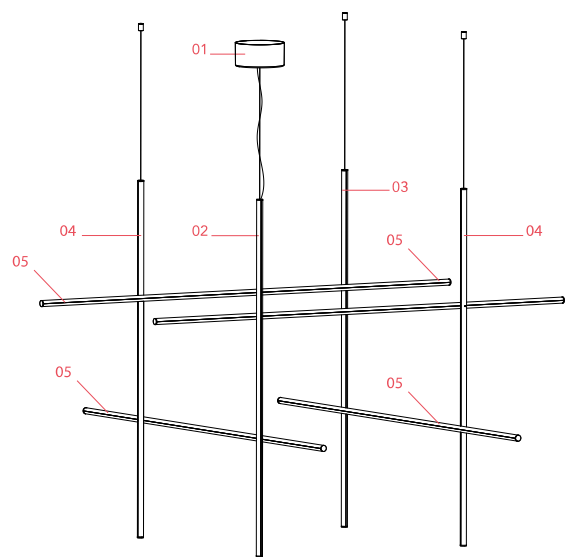

01.	Assembly Rose Cover for Coordinates S CLIII Anodized Champagne	RF1874144
02.	Coordinates Module CL. III Rod Assembly L1340 SA-32 Champagne	RF31461
03.	Coordinates S Rod Assembly L1340 S-30 Anodized Champagne	RF30989
04.	Coordinates S Rod Assembly L1340 S-29 Anodized Champagne	RF30988
05.	Coordinates S Rod Assembly L1760 H-31 Anodized Champagne	RF30990



RF1874144

Assembly Rose Cover for
Coordinates S CLIII Anodized
Champagne



RF31461

Coordinates Module CL. III Rod
Assembly L1340 SA-32
Champagne



RF30989

Coordinates S Rod Assembly
L1340 S-30 Anodized
Champagne



RF30988

Coordinates S Rod Assembly
L1340 S-29 Anodized
Champagne



RF30990

Coordinates S Rod Assembly
L1760 H-31 Anodized
Champagne