


## Coordinates Module Suspension

Designed by Michael Anastassiades, 2020

180W - 10230lm - 2700K - CRI> 90

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

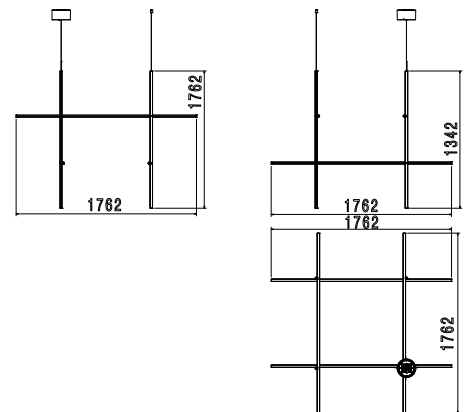

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607032862       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 180                 |
| Lumen Output (lm)      | 10230               |

### Physical

|                             |        |
|-----------------------------|--------|
| Colour                      | Argent |
| Length (mm)                 | 1770   |
| Cord colour                 | Clear  |
| Cord length (mm)            | 2400   |
| Canopy colour               | Argent |
| Canopy length/diameter (mm) | 181    |
| Canopy height (mm)          | 95     |
| Net weight (kg)             | 8.7    |
| Package volume (m3)         | 0.06   |
| IP internal                 | 20     |

### Download

Mounting instructions



PDF

### Photometric Files

ULD



ZIP

### Technical Drawings

3D




ZIP

Bim



ZIP

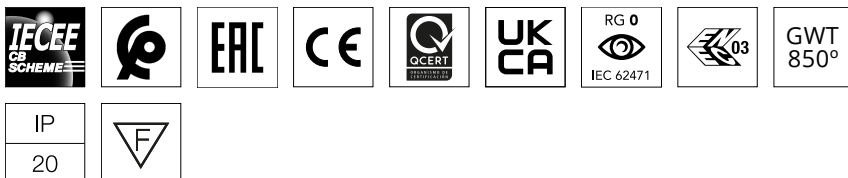

Photometric


|                    |            |
|--------------------|------------|
| Lighting type      | Total      |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |
| Extreme cut off    | No         |

Electrical


|                    |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| Insulation class   | I                                                                       |
| Frequency (Hz)     | 50/60                                                                   |
| Main voltage (Vac) | 100-240                                                                 |
| Power supply       | Integrated                                                              |
| Dimmable           | Yes                                                                     |
| Power supply type  | Dimmable 0-10V,<br>Dimmable Push,<br>Dimmable 1-10V,<br>Dimmable DALI 1 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not<br>Included)                             |
| Batteries inside   | No                                                                      |

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts



- 00. Assembly Rose RF1873133
- 00. Led dimmer kit RF34197



RF1873133

Assembly Rose



RF34197

Led dimmer kit