


Coordinates Suspension 1 CLIII

Designed by Michael Anastassiades, 2020



32W - 1920lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

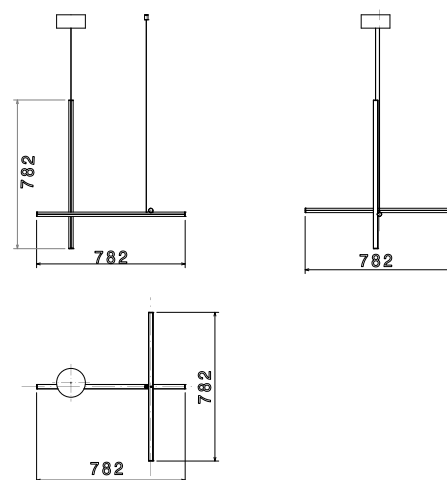

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607038314
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	32
Lumen Output (lm)	1920

Physical

Colour	Argent
Length (mm)	780
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Argent
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	1.2
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF29208

48Vdc 80W Power supply

Spare Parts

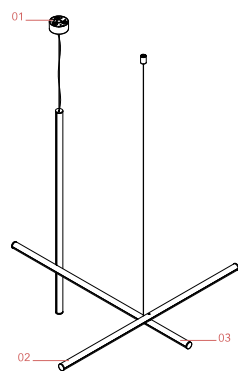

01.	Coordinates S CL. III Assembly Ceiling Rose Cover Argent	RF1874133
02.	Coordinates Rod Assembly L780 SH-03 Agent	RF30914
03.	Coordinates Suspension S3 Rod Assembly L780 SH-03 Argent	RF30911



RF1874133
Coordinates S CL, III Assembly
Ceiling Rose Cover Argent



RF30914
Coordinates Rod Assembly L780
SH-03 Agent



RF30911
Coordinates Suspension S3 Rod
Assembly L780 SH-03 Argent