

FLOS

F1860044 Anodized Champagne


Coordinates Suspension 1

Designed by Michael Anastassiades, 2020



37W - 1920lm - 2700K - CRI > 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001707
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	37
System flux (lm)	1920

Physical

Colour	Anodized Champagne
Length (mm)	780
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Anodized Champagne
Canopy dimension (mm)	149
Canopy height (mm)	71
Net weight (kg)	2.1
Package volume (m3)	0.02
IP internal	20

Download

[Mounting instructions](#) [↓ PDF](#)

Photometric Files

[ULD](#) [↓ ZIP](#)

Technical Drawings

[3D](#) [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-240
LED voltage Vf (Vdc)	null
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

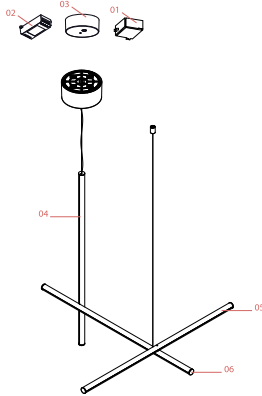

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Assembly Rose for Coordinates S Anodized Champagne | RF1872144 |
| 04. | Rod Assembly L780 SA-15 Anodized Champagne | RF31429 |
| 05. | Rod Assembly L780 H-06 Agent | RF31373 |
| 06. | Rod Assembly L780 SH-03 Agent | RF31372 |



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF1872144
Assembly Rose for Coordinates S
Anodized Champagne



RF31429
Rod Assembly L780 SA-15
Anodized Champagne



RF31373
Rod Assembly L780 H-06 Agent



RF31372
Rod Assembly L780 SH-03 Agent