

# FLOS

FU186244 Anodized Champagne


## Coordinates Suspension 2

Designed by Michael Anastassiades, 2020



55W - 2960lm - 2700K - CRI > 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S&tilde;o Paolo-based architect Isay Weinfeld.

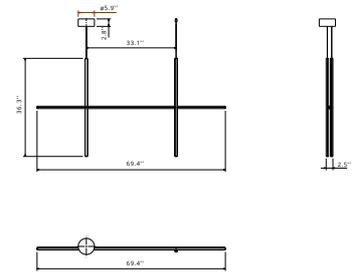

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	55
System flux (lm)	2960

### Physical

Color	Anodized Champagne
Length (in)	69.29
Cord color	Black
Cord length (in)	94.488
Canopy color	Anodized Champagne
Canopy length/diameter (in)	5.866
Canopy height (in)	2.795
Net weight (lb)	5.95
Package volume (in)	1748.21
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

ULD [↓ ZIP](#)

### Technical Drawings

3D [↓ ZIP](#)



GWT  
850°

IP  
20

## Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

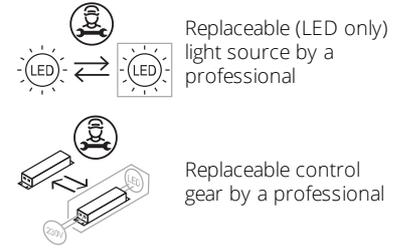

## Spare Parts

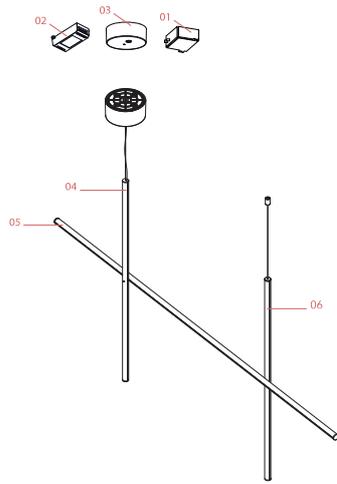

- |     |   |           |
|-----|---|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule                | RF0410500 |
| 02. | Led dimmer kit  | RF35452   |
| 03. | Coordinates S Ceiling rose cover Anodized Champagne                 | RF1872144 |
| 05. | Coordinates Suspension 2 Rod Assembly L1760 H-21 Anodized Champagne | RF31444   |
| 06. | Coordinates Suspension 2 Rod Assembly L920 S-20 Anodized Champagne  | RF31443   |



RF0410500  
Power supply kit for  
Arrangements small &  
Noctambule



RF35452  
Led dimmer kit



RF1872144  
Coordinates S Ceiling rose cover  
Anodized Champagne



RF31444  
Coordinates Suspension 2 Rod  
Assembly L1760 H-21 Anodized  
Champagne



RF31443  
Coordinates Suspension 2 Rod  
Assembly L920 S-20 Anodized  
Champagne