


## Coordinates Suspension 3

Designed by Michael Anastassiades, 2020



71W - 3850lm - 2700K - CRI> 95

Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by S&tilde;o Paolo-based architect Isay Weinfeld.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607038420       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 71                  |
| System flux (lm)       | 3850                |

### Physical

|                             |         |
|-----------------------------|---------|
| Color                       | Argent  |
| Length (in)                 | 30.71   |
| Cord color                  | Black   |
| Cord length (in)            | 94.488  |
| Canopy color                | Argent  |
| Canopy length/diameter (in) | 5.866   |
| Canopy height (in)          | 2.795   |
| Net weight (lb)             | 7.05    |
| Package volume (in)         | 2160.86 |
| IP internal                 | 20      |

### Download

Mounting instructions [Download PDF](#)

### Photometric Files

ULD [Download ZIP](#)

### Technical Drawings

3D [Download ZIP](#)



## Photometric


|                    |            |
|--------------------|------------|
| Lighting type      | Total      |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 95         |
| Extreme cut off    | No         |

## Electrical


|                    |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| Insulation class   | I                                                                       |
| Frequency (Hz)     | 50/60                                                                   |
| Main voltage (Vac) | 100-240                                                                 |
| Driver             | Integrated                                                              |
| Dimmable           | Yes                                                                     |
| Dimming type       | Dimmable 0-10V,<br>Dimmable Push,<br>Dimmable 1-10V,<br>Dimmable DALI 1 |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not<br>Included)                             |
| Batteries inside   | No                                                                      |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

Spare Parts

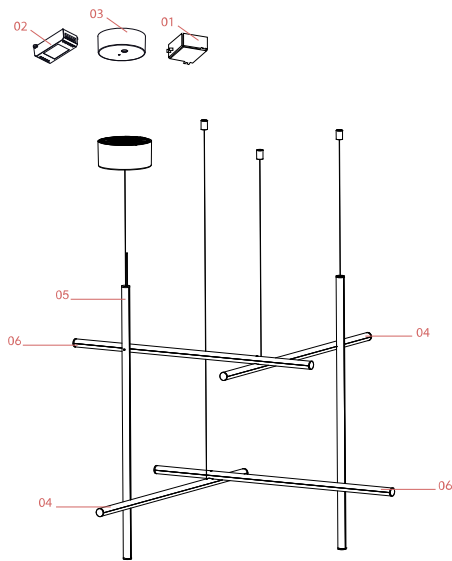

|     |                                                          |           |
|-----|----------------------------------------------------------|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule     | RF0410500 |
| 02. | Led dimmer kit                                           | RF35452   |
| 03. | Assembly Rose for Coordinates Suspension Argent          | RF1872133 |
| 04. | Coordinates Suspension S3 Rod Assembly L780 SH-03 Argent | RF30911   |
| 05. | Coordinates Suspension S3 Rod Assembly L780 SA-49 UL     | RF30957   |
| 06. | Coordinates Suspension S3 Rod Assembly L780 H-02 Argent  | RF30910   |
| 07. | Coordinates Suspension S3 Rod Assembly L780 S-04 Argent  | RF30912   |




RF0410500

Power supply kit for  
Arrangements small &  
Noctambule



RF35452

Led dimmer kit



RF1872133

Assembly Rose for Coordinates  
Suspension Argent



RF30911

Coordinates Suspension S3 Rod  
Assembly L780 SH-03 Argent



RF30957

Coordinates Suspension S3 Rod  
Assembly L780 SA-49 UL



RF30910

Coordinates Suspension S3 Rod  
Assembly L780 H-02 Argent



RF30912

Coordinates Suspension S3 Rod  
Assembly L780 S-04 Argent