


## Coordinates Suspension 4 CLIII

Designed by Michael Anastassiades, 2020

147W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CL III version is also available for each configuration for installations with a remote power supply.

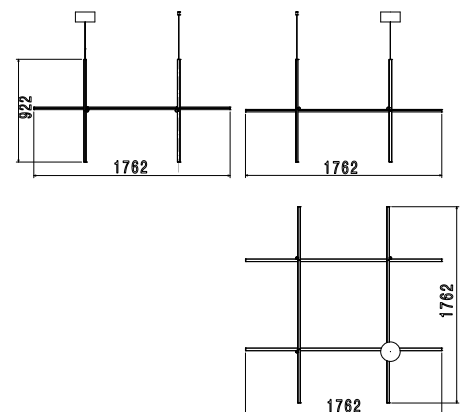

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607032626
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	147
Lumen Output (lm)	8830

### Physical

Colour	Anodized Champagne
Length (mm)	1770
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	5.2
Package volume (m3)	0.05
IP internal	20

### Download

Mounting instructions [Download PDF](#)

### Photometric Files

ULD [Download ZIP](#)

### Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)  
light source by a  
professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF29209

48Vdc 180W Power supply

Spare Parts

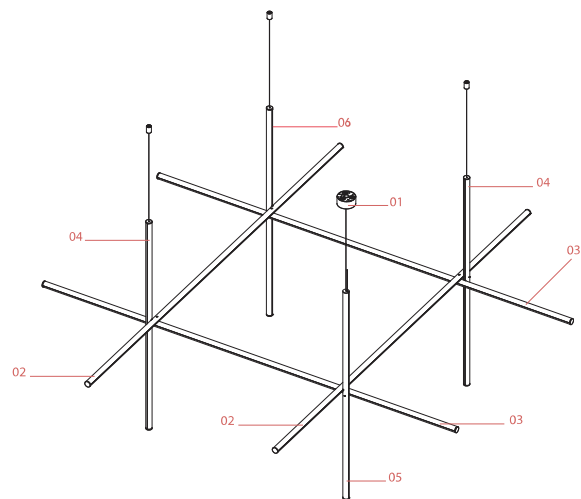

01.	Assembly Rose Cover for Coordinates S CLIII Anodized Champagne	RF1874144
02.	Coordinates Rod Assembly L1760 H-11 Anodized Champagne	RF30985
03.	Coordinates Rod Assembly L1760 H-10 Anodized Champagne	RF30984
04.	Coordinates Suspension 4 Rod Assembly L920 S-14 Anodized Champagne	RF30983
05.	Rod Assembly L920 SA-40 Anodized Champagne	RF31455
06.	Coordinates Suspension 4 Rod Assembly L920 S-13 Champagne	RF30982



RF1874144  
Assembly Rose Cover for  
Coordinates S CLIII Anodized  
Champagne



RF30985  
Coordinates Rod Assembly  
L1760 H-11 Anodized  
Champagne



RF30984  
Coordinates Rod Assembly  
L1760 H-10 Anodized  
Champagne



RF30983  
Coordinates Suspension 4 Rod  
Assembly L920 S-14 Anodized  
Champagne



RF31455  
Rod Assembly L920 SA-40  
Anodized Champagne



RF30982  
Coordinates Suspension 4 Rod  
Assembly L920 S-13 Champagne