


Coordinates Suspension 4

Designed by Michael Anastassiades, 2020



161W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne or argent finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S3, S4) with 2.4-m cables. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607001677
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	161
Lumen Output (lm)	8830

Physical

Colour	Anodized Champagne
Length (mm)	1762
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	181
Canopy height (mm)	95
Net weight (kg)	7.9
Package volume (m3)	0.06
IP internal	20

Download

Mounting instructions  PDF


Photometric Files

ULD  ZIP

Technical Drawings

3D  ZIP

 Bim  ZIP

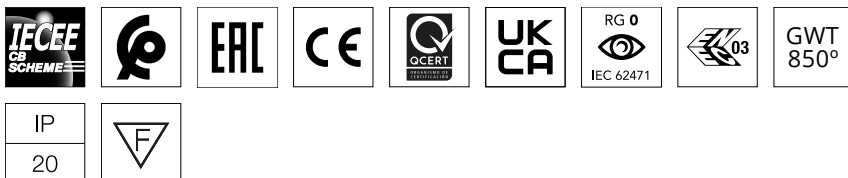

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Spare Parts

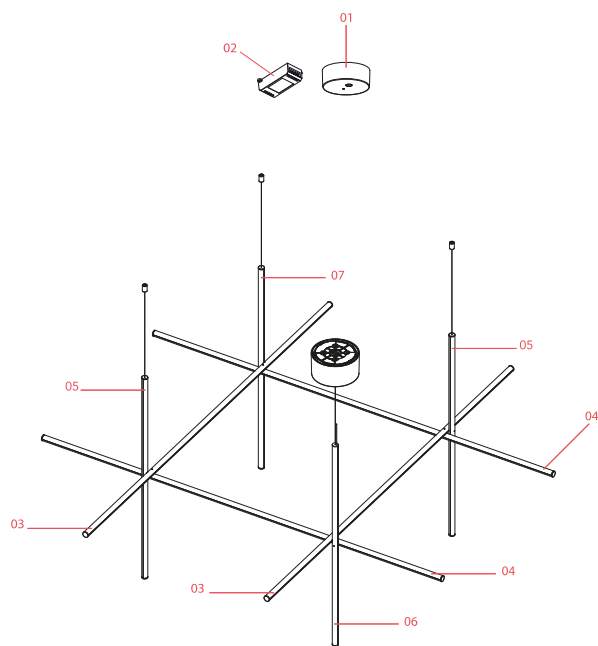

01.	Coordinates S Assembly Big Rose Anodized Champagne	RF1873144
02.	Led dimmer kit	RF34197
03.	Coordinates Rod Assembly L1760 H-11 Anodized Champagne	RF30985
04.	Coordinates Rod Assembly L1760 H-10 Anodized Champagne	RF30984
05.	Coordinates Suspension 4 Rod Assembly L920 S-14 Anodized Champagne	RF30983
06.	Coordinates Suspension 4 Rod Assembly L920 S-13 Champagne	RF30982
07.	Coordinates Suspension 4 Rod Assembly L920 SA-12 Champagne	RF31454



RF1873144
Coordinates S Assembly Big Rose
Anodized Champagne



RF34197
Led dimmer kit



RF30985
Coordinates Rod Assembly
L1760 H-11 Anodized
Champagne



RF30984
Coordinates Rod Assembly
L1760 H-10 Anodized
Champagne



RF30983
Coordinates Suspension 4 Rod
Assembly L920 S-14 Anodized
Champagne



RF30982
Coordinates Suspension 4 Rod
Assembly L920 S-13 Champagne



RF31454
Coordinates Suspension 4 Rod
Assembly L920 SA-12
Champagne