

FLOS

FA53906506-300 Grey

Dooku 400 Double Top Pole Ø102 mm Symmetric Optic Dimmable Dali NEW


Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 102mm diameter post. The post must be ordered separately. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

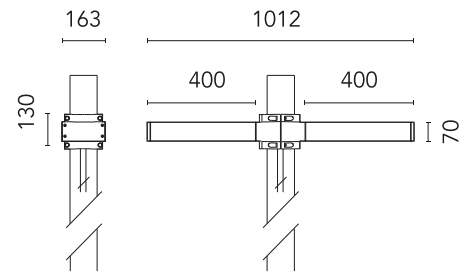

Main specifications

| | |
|-------------------|---------------|
| EAN | 8054793805573 |
| Mounting | Pole Top |
| Power (W) | 67 |
| Source flux (lm) | 18252 |
| Lumen Output (lm) | 15010 |

Physical

| | |
|---------------------|-------|
| Colour | Grey |
| Orientation | Fixed |
| Net weight (kg) | 13.08 |
| Package height (mm) | 605 |
| Package width (mm) | 175 |
| Package length (mm) | 150 |
| Package volume (m3) | 0.02 |
| IP internal | 65 |

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Beam Angle: 121°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 980 | 3.54 |
| 2 | 245 | 7.09 |
| 3 | 109 | 10.63 |
| 4 | 61 | 14.18 |
| 5 | 39 | 17.72 |

Photometric

| | |
|------------------------|------|
| CCT (K) | 4000 |
| Beam angle C0-180 (°) | 120 |
| Beam angle C90-270 (°) | 120 |
| Extreme cut off | No |

Electrical

| | |
|-------------------|-----------------|
| Power supply type | Dimmable DALI 1 |
| Emergency | No |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance