

FLOS


FA53909033-300 Anthracite

Dooku 400 Single Top Pole Ø102 mm Symmetric Optic Dimmable Dali NEW

Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Smart-City version available upon request. Single socket for 102mm diameter post. The post must be ordered separately. Smart-City version available upon request.

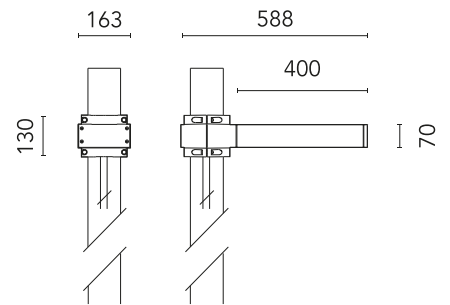

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793804408
Mounting	Pole Top
Power (W)	67
Source flux (lm)	18252
Lumen Output (lm)	15010

Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.09
Package height (mm)	605
Package width (mm)	175
Package length (mm)	150
Package volume (m3)	0.02
IP internal	65

Download

[Mounting instructions](#) ZIP

Photometric Files

[LDT / IES](#) ZIP


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Beam Angle: 121°

h(m)	E(lx)	D(m)
1	885	3.54
2	221	7.09
3	98	10.63
4	55	14.18
5	35	17.72

Luminous flux Luminaire
3389 lm

Photometric

Beam angle C0-180 (°) 120

Beam angle C90-270 (°) 120

Extreme cut off No

Electrical

Power supply type Dimmable DALI 1

Emergency No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance