

FLOS

FA53908233-300 Anthracite

Dooku 400 Single Top Pole Ø76 mm Foot&Cycle Optic Dimmable Dali NEW


Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Single socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

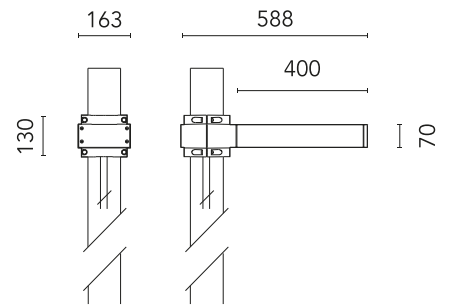

Main specifications

| | |
|-------------------|---------------|
| EAN | 8054793803760 |
| Mounting | Pole Top |
| Power (W) | 67 |
| Source flux (lm) | 18252 |
| Lumen Output (lm) | 15010 |

Physical

| | |
|---------------------|------------|
| Colour | Anthracite |
| Orientation | Fixed |
| Net weight (kg) | 13.09 |
| Package height (mm) | 605 |
| Package width (mm) | 175 |
| Package length (mm) | 150 |
| Package volume (m3) | 0.02 |
| IP internal | 65 |

Download

[Mounting instructions](#) ZIP

Photometric Files

[LDT / IES](#) ZIP


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Beam Angle: 41°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 1406 | 0.91 |
| 2 | 352 | 1.82 |
| 3 | 156 | 2.73 |
| 4 | 88 | 3.63 |
| 5 | 56 | 4.54 |

Luminous flux Luminaire
3130 lm

Photometric

Extreme cut off No

Electrical

Power supply type Dimmable DALI 1

Emergency No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance
