

FLOS

FA53903533-310 Anthracite

Dooku 600 Double Top Pole Ø102 mm Foot&Cycle Optic Dimmable 1-10V NEW


Designed by FLOS Outdoor, 2014



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 102mm diameter post. The post must be ordered separately. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

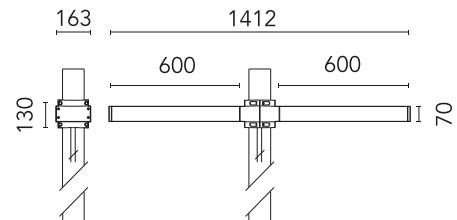

Main specifications

EAN	8054793680996
Mounting	Pole Top
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	2
Power (W)	67
System power (W)	2X78
Source flux (lm)	18252
Lumen Output (lm)	13864

Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.8
Package height (mm)	825
Package width (mm)	380
Package length (mm)	185
Package volume (m3)	0.06
IP internal	65

Download

Mounting instructions [ZIP](#)



Photometric Files

LDT / IES



Technical Drawings


2D



3D



Schematic light drawing



Photometric

Light distribution	Asymmetric
CCT (K)	4000
CRI>	80
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Dimming interface	Dimmer Integrated
Emergency	No

Ecodesesign and Energy

Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



REQUIRED
Pole

FA414033

Pole Ø 102 mm h 4000 mm With
Base



REQUIRED
Pole

FA414533

Pole Ø 102 mm h 4000 mm
(+500 mm In-ground)



REQUIRED
Pole

FA415033

Pole Ø 102 mm h 5000 mm With
Base



REQUIRED
Pole

FA415533

Pole Ø 102 mm h 5000 mm
(+500 mm In-ground)



OPTIONAL
Accessory

FA116

Base Plate and Fixing Bolts for
Pole Ø 102 mm h 4000/5000
mm with Base



OPTIONAL
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION
DEVICE)