

# FLOS

FA53910806-300 Grey


## Dooku 600 Double Top Pole Ø76 mm Symmetric Optic Dimmable Dali

NEW

Designed by FLOS Outdoor



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

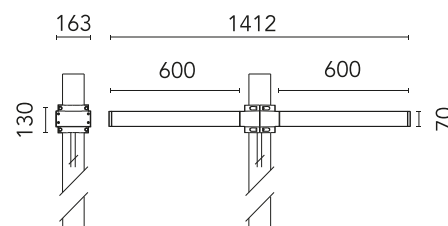

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                   |               |
|-------------------|---------------|
| EAN               | 8054793808475 |
| Mounting          | Pole Top      |
| Power (W)         | 67            |
| Source flux (lm)  | 18252         |
| Lumen Output (lm) | 15010         |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Grey  |
| Orientation         | Fixed |
| Net weight (kg)     | 13.08 |
| Package height (mm) | 605   |
| Package width (mm)  | 175   |
| Package length (mm) | 150   |
| Package volume (m3) | 0.02  |
| IP internal         | 65    |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)


### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing



Photometric

|                        |     |
|------------------------|-----|
| Beam angle C0-180 (°)  | 120 |
| Beam angle C90-270 (°) | 120 |
| Extreme cut off        | No  |

Electrical

|                   |                 |
|-------------------|-----------------|
| Power supply type | Dimmable DALI 1 |
| Emergency         | No              |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance