

FLOS

05.7617.B1A White

Easy Kap Ø30 Adjustable

Designed by FLOS Architectural, 2023



COOKIES

Flos S.p.A. use functional, analytical, profiling and marketing cookies (and similar technologies), placed by themselves and third parties, in order to measure the use of, optimise and further develop our website, as well as for (personalised) advertising purposes and to monitor and analyse your internet behaviour.

By clicking on "Refuse unnecessary" only technical/functionality cookies will be installed. By clicking on "Accept all" you consent to the use of all the cookies. By clicking on "Change settings" you can accept or refuse cookies on the basis on your preferences and save your choices. You can modify your options anytime. To know more refer to our [Cookie Policy](#).

Refuse unnecessary

Change settings


Accept all

IP external

54



Schematic light drawing




Beam Angle: 35°

h(m)	E(lx)	D(m)
1	486	0.62
2	121	1.24
3	54	1.87
4	30	2.49
5	19	3.11

Luminous flux luminaire
203 lm

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**

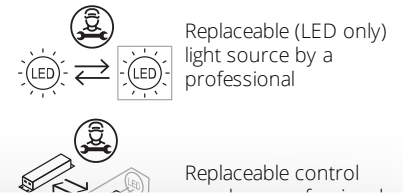

COOKIES

Flos S.p.A. use functional, analytical, profiling and marketing cookies (and similar technologies), placed by themselves and third parties, in order to measure the use of, optimise and further develop our website, as well as for (personalised) advertising purposes and to monitor and analyse your internet behaviour.

By clicking on "Refuse unnecessary" only technical/functionality cookies will be installed. By clicking on "Accept all" you consent to the use of all the cookies. By clicking on "Change settings" you can accept or refuse cookies on the basis on your preferences and save your choices. You can modify your options anytime. To know more refer to our [Cookie Policy](#).

Refuse unnecessary

Change settings

Accept all

B: Register for service operation is required

POWER SUPPLY



1-10V 110-127 / 220-240 900mA	60.9208	2 - 5	B
Casambi 220-240V 900mA	06.1974.00	1 - 5	B
Mains Dimming 220-240V 900mA	60.9467	2 - 7	B
Mains Dimming 220-240V 900mA	60.9692	4 - 9	B

** Minimum embedding height 65mm only for 30mm ceiling thickness



COOKIES

Flos S.p.A. use functional, analytical, profiling and marketing cookies (and similar technologies), placed by themselves and third parties, in order to measure the use of, optimise and further develop our website, as well as for (personalised) advertising purposes and to monitor and analyse your internet behaviour.

By clicking on "Refuse unnecessary" only technical/functionality cookies will be installed. By clicking on "Accept all" you consent to the use of all the cookies. By clicking on "Change settings" you can accept or refuse cookies on the basis on your preferences and save your choices. You can modify your options anytime. To know more refer to our [Cookie Policy](#).

Refuse unnecessary

Change settings

Accept all

Constant current power supply,
with dip-switch programmable
power supply current.

220-240V 700mA

0,38-36W 220-240V 900mA

220-240V 900mA



REQUIRED
Power supply

Electrical

600467

COOKIES

Flos S.p.A. use functional, analytical, profiling and marketing cookies (and similar technologies), placed by themselves and third parties, in order to measure the use of, optimise and further develop our website, as well as for (personalised) advertising purposes and to monitor and analyse your internet behaviour.

By clicking on "Refuse unnecessary" only technical/functionality cookies will be installed. By clicking on "Accept all" you consent to the use of all the cookies. By clicking on "Change settings" you can accept or refuse cookies on the basis on your preferences and save your choices. You can modify your options anytime. To know more refer to our [Cookie Policy](#).

Refuse unnecessary

Change settings

Accept all