

# FLOS

05.7600.GLA Gold

## Easy Kap Ø30 Fixed

Designed by FLOS Architectural, 2023


LED - Power LED - 3W - 205lm - 2700K - CRI> 90 - Beam° 19



Recessed luminaire with LED light source. Power supply not included. Installation frame not required.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

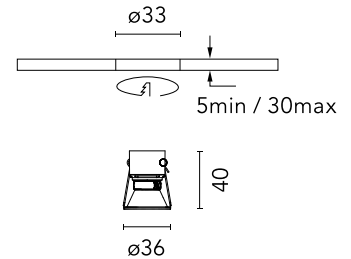

### Main specifications

Mounting	Ceiling recessed
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	3
System power (W)	4.7
Source flux (lm)	222
Lumen Output (lm)	205

### Physical

Colour	Gold
Trim	Yes
Orientation	Fixed
Recessed depth (mm)	54
Length (mm)	37
Net weight (kg)	0.04
Package height (mm)	70
Package width (mm)	61
Package length (mm)	85
IP internal	20
IP external	54

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



## Schematic light drawing



Beam Angle: 19°

h(m)	E(lx)	D(m)
1	1252	0.34
2	313	0.68
3	139	1.02
4	78	1.36
5	50	1.70

Luminous flux Luminaire  
205 lm

## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	89
Rg gamut index	101
LED Life / Failure Ratio	L90B50>51.000h_Tc85°C
Beam angle C0-180 (°)	19
Beam angle C90-270 (°)	19
Extreme cut off	No
UGR <sub>L</sub>	<10

## Electrical

Insulation class	III
Forward voltage (V)	3.3
LED current (mA)	900
Power supply	Remote excluded
Power supply type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V, Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**

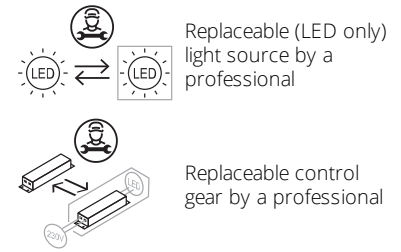

 <b>⚠ A: Driver pass-through</b>		Recommended power supply		Serial Con.	⚠
 <b>⚠ B: Register for service operation is required</b>	 <b>POWER SUPPLY</b>	Non Dimmable 220-240V 700mA	60.9988	1	A
		Non Dimmable 220-240V 900mA	60.9958	1 - 11	B
		Dali 2 220-240V 900mA	60.9602	1 - 5	B
		Dali 2 220-240V 900mA	60.9957	3 - 11	B
		1-10V 220-240V 900mA	60.9414	1 - 5	B
		1-10V 110-127 / 220-240 900mA	60.9208	2 - 5	B
		Casambi 220-240V 900mA	06.1974.00	1 - 5	B
		Mains Dimming 220-240V 900mA	60.9467	2 - 7	B
		Mains Dimming 220-240V 900mA	60.9692	4 - 9	B
		** Minimum embedding height 65mm only for 30mm ceiling thickness			