

# FLOS

05.8034.14 Black



## Eclectic 70 Adjustable Soft

Designed by FLOS Architectural, 2022



7.5W - 557lm - 3000K - CRI> 90 - Beam° 24

Eclectic Ø70. Adjustable Downlight (35° tilt, 360° rotation). "Soft" style façade. Necessary installation pre-frames, not included (to be ordered separately). Recessed position of the LED: 47° cut-off angle. IP20 water tightness (for IP54, please ask the dedicated accessory). Alternative options for lenses, orientation modules and style façades are available as spare parts.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Number of lamps        | 1                   |
| Power (W)              | 7.5                 |
| System power (W)       | 9.9                 |
| Lumen Output (lm)      | 557                 |
| Efficacy (lm/W)        | 74                  |

### Physical

|                     |            |
|---------------------|------------|
| Colour              | Black      |
| Orientation         | Adjustable |
| Recessed depth (mm) | 134        |
| Spot diameter (mm)  | 75         |
| Length (mm)         | 75         |
| Net weight (kg)     | 0.16       |
| Package height (mm) | 90         |
| Package width (mm)  | 140        |
| Package length (mm) | 105        |
| IP internal         | 20         |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



## Schematic light drawing



## Photometric

|                          |                        |
|--------------------------|------------------------|
| Lighting type            | Direct                 |
| Light distribution       | Symmetric              |
| CCT (K)                  | 3000                   |
| CRI>                     | 90                     |
| McAdam steps (SDCM)      | 2                      |
| Rf fidelity index        | 92                     |
| Rg gamut index           | 98                     |
| LED Life / Failure Ratio | L70B50>55.000h_Tc=85°C |
| Beam angle C0-180 (°)    | 24                     |
| Beam angle C90-270 (°)   | 24                     |
| UGR <sub>L</sub>         | <10                    |

## Electrical

|                   |  |
|-------------------|--|
| Insulation class  | III  |
| LED current (mA)  | 600  |
| Power supply      | Remote   |
| Dimmable          | Yes  |
| Power supply type | Dimmable DALI 2,<br>Dimmable 0-10V,<br>Dimmable Casambi,<br>Dimmable Push,<br>Dimmable 1-10V,<br>Mains Cut Dimming |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



## Accessories & Power Supply



REQUIRED  
Power supply

Electrical

60.9162

Continuous current power supply 220/240V - 50/60Hz. Adjustable Current 300mA-13W / 350mA-15W / 400mA-18W / 450mA-20W / 500mA-22W / 550mA-24W / 600mA-27W / 650mA-29W / 700mA-31W / 750mA-32W / 800mA-33W / 850mA-35W / 900mA-38W / 950mA-40W / 1000/1050mA-4...



REQUIRED  
Power supply

Electrical

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



REQUIRED  
Power supply

Electrical

60.9208

Continuous current power supply of 13-20W - Dim 1-10V&Push - 110/240V - 50/60Hz with power current selected through adjustable



REQUIRED  
Power supply

Electrical

60.9845

Continuous current power supply 40W, 220/240V - 50/60Hz with power current selected through adjustable switch. Dimmable 0-10V/PWM/RX. Output current: 1050mA - 40W / 1000mA - 40W / 950mA - 40W / 900mA - 37W / 850mA - 35W / 800mA - 33W / 750mA - 31W / 70...



REQUIRED  
Power supply

Electrical

60.9713.0600

600mA, 20 W, 220/240 V - 50/60 Hz constant current power supply. Dimmable by Dali2



REQUIRED  
Power supply

Electrical

60.7678



REQUIRED  
Frame

Installation

08.0670.14

Trim Frame



REQUIRED  
Frame

Installation

08.0670.40

Trim Frame

Continuous current supply  
source of 240V - 50/60Hz with  
dimmable Dali 2, Push dimming.  
150mA - 7.8W / 200mA - 10.4W /  
250mA - 13W / 300mA - 15.6W /  
350mA - 18.2W / 400mA - 20.8W  
/ 500mA - 26W / 600mA - 31.2W  
/ 700mA - 36.4W / 750mA - 39W  
/ 800mA - 41.6...



REQUIRED  
Frame

Installation

08.0672.00

No Trim Frame



REQUIRED  
Power supply

Electrical

60.7785

Constant current power supply 42W, 220-240V CASAMBI dimmable.



REQUIRED  
Power supply

Electrical

60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...



OPTIONAL  
Accessory

Optical

08.0727.00

Honeycomb for Eclectic 70



OPTIONAL  
Accessory

Installation

08.0729.00

IP54 Lens for Eclectic 70 Adjustable



OPTIONAL  
Filter

Optical

08.0731.00

Colour Temperature Increaser for Eclectic 70




OPTIONAL  
Filter

Optical

08.0732.00

Colour Temperature Decreaser for Eclectic 70

## Spare Parts

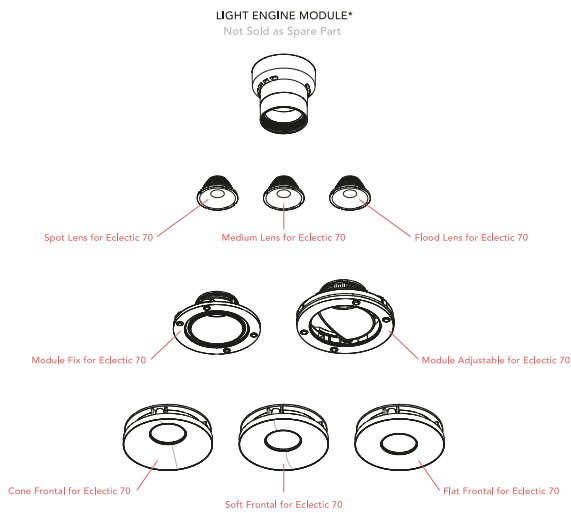

Light Engine Module not sold as Spare Part, Special Orders Please Consult.

|                                   |            |
|-----------------------------------|------------|
| Spot Lens for Eclectic 70         | 08.0711.00 |
| Medium Lens for Eclectic 70       | 08.0712.00 |
| Flood Lens for Eclectic 70        | 08.0713.00 |
| Cone Frontal for Eclectic 70      | 08.0721.14 |
| Cone Frontal for Eclectic 70      | 08.0721.40 |
| Soft Frontal for Eclectic 70      | 08.0722.14 |
| Soft Frontal for Eclectic 70      | 08.0722.40 |
| Flat Frontal for Eclectic 70      | 08.0723.14 |
| Flat Frontal for Eclectic 70      | 08.0723.40 |
| Module Fix for Eclectic 70        | 08.0739.00 |
| Module Adjustable for Eclectic 70 | 08.0740.00 |



08.0711.00  
Spot Lens for Eclectic 70



08.0712.00  
Medium Lens for Eclectic 70



08.0713.00  
Flood Lens for Eclectic 70



08.0721.14  
Cone Frontal for Eclectic 70



08.0721.40  
Cone Frontal for Eclectic 70



08.0722.14  
Soft Frontal for Eclectic 70



08.0722.40  
Soft Frontal for Eclectic 70



08.0723.14  
Flat Frontal for Eclectic 70



08.0723.40

Flat Frontal for Eclectic 70



08.0739.00

Module Fix for Eclectic 70



08.0740.00

Module Adjustable for Eclectic 70