

FLOS

05.4381.RY.90 Deep Red

Emi Table NEW


Designed by Erwan Bouroullec, 2023



Anti-glare appliance for installation on tables and coffee tables. Built-in 100-240 V power supply, with cable and plug. Spare parts for the optical module (lens) are available, please see the accessories. Independent control of the Up&Down lighting through Touch Dimming capacitive sensors in the top part of the central rod.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

| | |
|------------------------|---------------------|
| EAN | 8424229003260 |
| Mounting | Table |
| Environments | Indoor dry location |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Lamp category | LED |
| Number of lamps | 1 |
| Power (W) | 37.5 |
| System power (W) | 41 |
| Source flux (lm) | 4272 |
| System flux (lm) | 2886 |

Physical

| | |
|------------------|----------|
| Color | Deep Red |
| Orientation | Fixed |
| Cord color | Black |
| Cord length (in) | 98 |
| Net weight (lb) | 18.52 |
| IP internal | 20 |

Download

| | |
|-----------------------|-----|
| Family spec sheet | ZIP |
| Mounting instructions | PDF |

Photometric Files


| | |
|-----------|-----|
| ULD | ZIP |
| LDT / IES | ZIP |

Technical Drawings

| | |
|----|-----|
| 2D | ZIP |
| 3D | ZIP |



Schematic light drawing



Photometric


| | |
|--------------------------|-------------------------|
| Lighting type | Total |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 90 |
| McAdam steps (SDCM) | 3 |
| Rf fidelity index | 90 |
| Rg gamut index | 100 |
| LED Life / Failure Ratio | L80B50>60.000h @Tc=85°C |
| Beam angle C0-180 (°) | 32 |
| Beam angle C90-270 (°) | 32 |
| Extreme cut off | Yes |
| UGR _L | <19 |

Electrical

| | |
|--------------------|-------------------|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| LED current (mA) | 760 |
| Driver | Integrated |
| Dimmable | Yes |
| Dimming range (%) | 1-100 |
| Dimming interface | Dimmer Integrated |
| Plug type | Twist and Lock |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

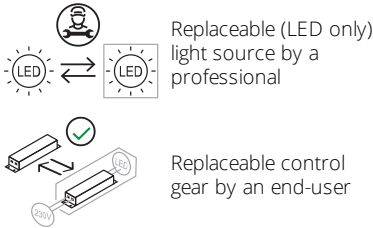

Notes

Gross luminous flux:
UpLigh - 3111 lm
DownLight - 1167 lm
Net luminous flux:
UpLigh - 2154 lm
DownLight - 731 lm The technological heart of Emi combines with an exquisitely crafted base made of cast iron. Imperfections present on the surface of the base are the result of a manual production process that makes each product unique. Class 2 Listed.

Accessories & Power Supply



OPTIONAL
Diffuser
Optical

08.0956.14
3 Lens Kit for EMI Ceiling Large,
EMI Floor & EMI Table - Flood
Optic



OPTIONAL
Diffuser
Optical

08.0956.40
3 Lens Kit for EMI Ceiling Large,
EMI Floor & EMI Table - Flood
Optic