


# FLOS

SP15W700MA-VAR-U01 Raw

## ERP ESS015W-0700-18 12.6W, 700mA, 10-1VDC, Tri mode dim

Designed by FLOS Architectural



'Splice Box

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications


Environments	Indoor dry location
Power (W)	12.6

### Physical

Color	Raw
Length (in)	7
IP internal	20

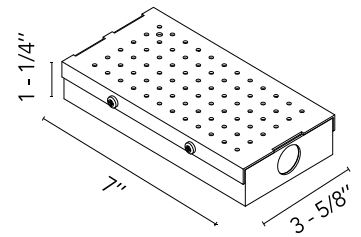

### Ecodesign and Energy Labelling



Replaceable control gear by a professional

## Photometric

Extreme cut off No

## Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED current (mA)	700
Driver	Included in required housing
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Precabled	No

## Notes

Class 2, Size: 7" x 3-5/8" x 1-1/4"

---