

FLOS

09.3756.14A Black

Find Me 1 (Trim/No Trim)

Designed by Jorge Herrera, 2016



Recessed adjustable luminaire for indoor application. Remote power supply 500 mA not included.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	6
Source flux (lm)	560
Lumen Output (lm)	321

Physical

Colour	Black
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Recessed depth (mm)	147
Spot diameter (mm)	35
Net weight (kg)	0.23
IP internal	20

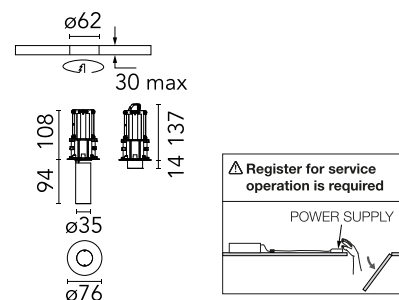

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)

Bim [Download ZIP](#)




Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Rf fidelity index	91
Rg gamut index	98
LED Life / Failure Ratio	L80B20 >36000h (Tc=85°C)
Beam angle C0-180 (°)	18
Beam angle C90-270 (°)	18
UGR _L	<10

Electrical

Insulation class	III
Frequency (Hz)	0
Forward voltage (V)	12
LED current (mA)	500
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Mains Cut Dimming

Notes

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place.

Accessories & Power Supply



REQUIRED
Power supply
Electrical

60.8880
Continuous current power supply
of 6W, 100V / 14W, 240V -
50/60Hz with 500 mA supply
voltage



REQUIRED
Power supply
Electrical

60.9188
Continuous current power supply
of 13-20W, 110*/240V - 50/60Hz
with current selected through
adjustable 200 mA - 13W / 300
mA - 15W / 350 mA - 18W / 400
/ 450 / 500 / 550 / 600 / 650 /
700 / 750 / 800 / 850 / 900 mA -
20W. switch. 0/1-10V or push.



REQUIRED
Power supply
Electrical

60.9160
Non dimmable continuous
current power supply of
220/240V - 50/60Hz with power
current selected through
adjustable with switch 200 mA -
8,5W / 250mA - 11W / 300 mA -
13W / 350 mA - 15W / 400 mA -
17,5W / 450 mA - 19,5W / 500
mA - 22W



REQUIRED
Power supply
Electrical

60.9222
Continuous current power supply
of 12-20W, 110/240V - 50/60Hz
with power current selected
through adjustable 250mA - 12W
/ 350mA - 17W / 400mA - 19W /
450 / 500/ 550 / 600 / 700mA -
20W regulable Dali 1 & Dali 2



REQUIRED
Power supply
Electrical

60.9207

Casambi continuous current
power supply, dimmable
220/240V - 50/60Hz, 300mA -
16W / 350mA - 18,5W / 400mA -
21,5W / 450 mA - 24W / 500mA -
27W / 600mA - 32W / 650 mA -
35W / 700 mA - 36W /750 /800
/900 /1000 /1050 /1200 mA -
38W.