FLOS

09.3708.30C9S White

Find Me 2 (Trim/No Trim)

Designed by Jorge Herrera, 2015

Hide-and-go-seek brought to light. The versatile Find Me is a tiny semi-recessed downlight hidden in the ceiling until otherwise sought. With a simple pull, the downlight can extend below the ceiling and transform into a refined cylindrical monopoint. This diminutive yet powerful luminaire is endlessly versatile and can tilt 90 degrees and rotate 360 degrees. Deep matte black snoot maximizes cut off and reduces glare. The Find Me line is available as a single with trim or without and as a pendant.

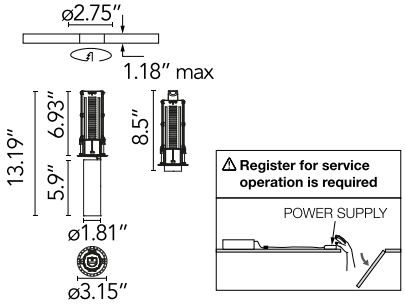

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7.2
Source flux (lm)	960
System flux (lm)	731

Physical

Color	White
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Recessed depth (in)	7.37
Net weight (lb)	1.2
Package volume (in)	916
IP internal	20

Download

Family spec sheet ZIP

Mounting instructions PDF

Photometric Files

LDT / IES ZIP

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional

©2022 Flos - P.IVA 00290820174 - 10/16/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Luminous flux luminaire
731 lm (EXTREME CUT OFF)

Beam Angle: 18°

h(m)	E(lx)	D(m)
1	5997	0.32
2	1499	0.64
3	666	0.96
4	375	1.28
5	240	1.60

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Rf fidelity index	91
Rg gamut index	98
LED Life / Failure Ratio	L80B20 >36000h (Tc=85°C)
Beam angle C0-180 (°)	18
Beam angle C90-270 (°)	18
UGR_L	<10

Electrical

Insulation class	III
Forward voltage (V)	12
LED current (mA)	600
Driver	Remote excluded
Dimmable	Yes

Notes

Integral LED is not field replaceable. IC-rated downlight for direct insulation contact. Fixture is constant Current Low Volatge LED, Class 2. Just 1 accessory can be install at the time. For filter options contact Flos. Wiring suitable for plenum spaces. Maximum remote distance is 50ft with 16ga. 3500K available, but not cataloged. Consult factory for additional color temperatures. Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series. Register for service operation is required.

©2022 Flos - P.IVA 00290820174 - 10/16/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply



REQUIRED
Power supply

SP25W600MA-10V-A02

Splice Box7"x3-5/8"x1-1/4", 600mA , 25W, 0-10V Dimmable, 120/277V



REQUIRED
Power supply

Electrical

SP40W600MA-10V-A01

Splice Box UL 7”x3-5/8”x1-1/4”, 600mA , 40W, 0-10V Dimmable, 120/277V

©2022 Flos - P.IVA 00290820174 - 10/16/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.