

FLOS

09.8406.SB Smooth Black

Gustave Residential


Designed by Vincent Van Duysen, 2022



Thanks to the particular lighting diffusion technology, the table rechargeable lamp perfectly lights up a wide surface stretching up to a meter. Powered by batteries (included inside the product). Charging by USB-C cable, included. Sequential dimming 0-100%. Gustave is the first luminaire to incorporate a system of exclusive, patented by Flos, asymmetrical emission lenses, arranged in revolution and spanning 360° around the position of the lamp.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

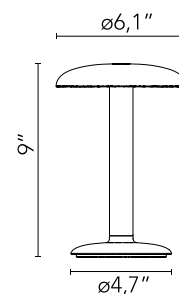

Main specifications

| | |
|------------------------|---------|
| Mounting | Table |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | Top LED |
| Number of lamps | 1 |
| System power (W) | 2.5 |
| Source flux (lm) | 235 |
| System flux (lm) | 169 |
| Efficacy (lm/W) | 73 |

Physical

| | |
|-------------|--------------|
| Color | Smooth Black |
| Cord color | Black |
| IP internal | 54 |

Download

| | |
|-----------------------|-----|
| Family spec sheet | ZIP |
| Mounting instructions | PDF |

Photometric Files


| | |
|-----------|-----|
| LDT / IES | ZIP |
|-----------|-----|

Technical Drawings

| | |
|----|-----|
| 2D | ZIP |
| 3D | ZIP |



Schematic light drawing

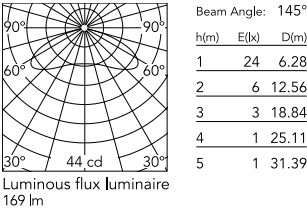

Photometric


| | |
|------------------------|----------------|
| Lighting type | Direct |
| Light distribution | Roto symmetric |
| CCT (K) | 3000 |
| CRI> | 90 |
| McAdam steps (SDCM) | 3 |
| Rf fidelity index | 93 |
| Rg gamut index | 100 |
| Beam angle C0-180 (°) | 144 |
| Beam angle C90-270 (°) | 144 |
| Extreme cut off | No |

Electrical

| | |
|----------------------------|-------------------|
| Insulation class | III |
| LED current (mA) | 180 |
| Dimmable | Yes |
| Dimming type | Dimmable |
| Dimming interface | Dimmer Integrated |
| Plug type | Type A |
| Batteries inside | Yes |
| Battery type | LI-IO |
| Charging cycles guaranteed | 500 |
| Charging max power | 1 A |
| Charging min time | 5.5 |
| Charging socket/connector | USB-C |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**

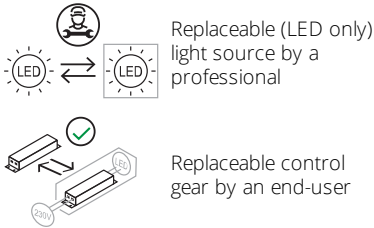

Notes

Product Battery autonomy: 100% - 6 hours / 50% - 10 hours / 25% - 18 hours.
Batteries included. USB-A / USB-C Cable included. Adapter 5V, min 2A not included.

Accessories & Power Supply



REQUIRED

RF25965

Adapter 5V. Min 2A | EUR USA
UK




REQUIRED

RF27576

Gaku Adapter 5V. Min 2A. EUR /
USA / UK

Spare Parts

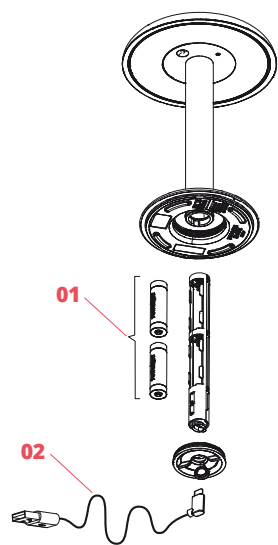

| | | |
|-----|---|------------|
| 01. | Pack 2x Battery for Gustave Residential | 08.0744.00 |
| 02. | Cable for Gustave Residential USB-A/USB-C | 08.0761.14 |
| 02. | Cable for Gustave Residential USB-A/USB-C | 08.0761.30 |



Electrical

08.0744.00

Pack 2x Battery for Gustave
Residential



Cable

08.0761.14

Cable for Gustave Residential
USB-A/USB-C



Cable

08.0761.30

Cable for Gustave Residential
USB-A/USB-C