


# FLOS

03.5332.29 Anodized Grey


## In-Finity 25 mm

Designed by FLOS Architectural, 2022



38.4W - 2016lm - 3000K - CRI> 90 - Beam° 91

LED profile for linear lighting, only 25 mm wide. Available in surface mounted versions, with possibility of suspended installation by means of a dedicated kit. Drivers not included.

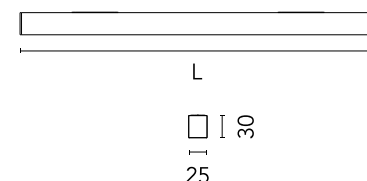

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension, Ceiling surface
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	38.4
System power (W)	38.8
Source flux (lm)	4206
System flux (lm)	2016

### Physical

Colour	Anodized Grey
Orientation	Fixed
Length (mm)	2000
Net weight (kg)	1.04
Package volume (m3)	0.02
IP internal	20

### Download

Mounting instructions	<a href="#">↓ PDF</a>
Mounting instructions	<a href="#">↓ PDF</a>

### Photometric Files


LDT / IES	<a href="#">↓ ZIP</a>
-----------	-----------------------

### Technical Drawings

2D	<a href="#">↓ ZIP</a>
3D	<a href="#">↓ ZIP</a>




Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L90B50 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	91
Beam angle C90-270 (°)	102

Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote
Dimmable	No
Power supply type	Non Dimmable

Accessories & Power Supply



REQUIRED  
Power supply  
Electrical

60.9516  
Remote Power Supply Non  
Dimmable 24V. 120W. 220/240V




REQUIRED  
Accessory  
Installation

08.0131.14  
Endcap for In-Finity 25 mm



REQUIRED  
Power supply  
Electrical

60.9515  
Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply  
Electrical

60.9705  
Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



OPTIONAL  
Accessory  
Installation

08.0139.00  
Suspension Kit for In-Finity  
25mm