


FLOS

03.5337.29 Anodized Grey


In-Finity 25 mm

Designed by FLOS Architectural, 2022



38.4W - 2104lm - 4000K - CRI> 90 - Beam° 91

LED profile for linear lighting, only 25 mm wide. Available in surface mounted versions, with possibility of suspended installation by means of a dedicated kit. Drivers not included.

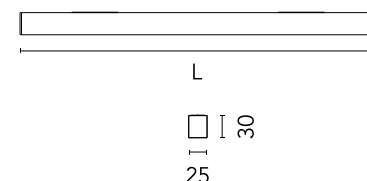

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Suspension, Ceiling surface
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	38.4
System power (W)	38.8
Source flux (lm)	4390
System flux (lm)	2104

Physical

Colour	Anodized Grey
Orientation	Fixed
Length (mm)	2000
Net weight (kg)	1.04
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
LED Life / Failure Ratio	L90B50 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	91
Beam angle C90-270 (°)	102

Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote
Dimmable	No
Power supply type	Non Dimmable

Accessories & Power Supply



REQUIRED
Power supply
Electrical

60.9516
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V

REQUIRED
Accessory
Installation

08.0131.29
Endcap for In-Finity 25 mm

REQUIRED
Power supply
Electrical

60.9515
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V

REQUIRED
Power supply
Electrical

60.9705
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



OPTIONAL
Accessory
Installation

08.0139.00
Suspension Kit for In-Finity
25mm