



## In-Finity 70 Suspension Down 3000K General Lighting

Designed by FLOS Architectural, 2017

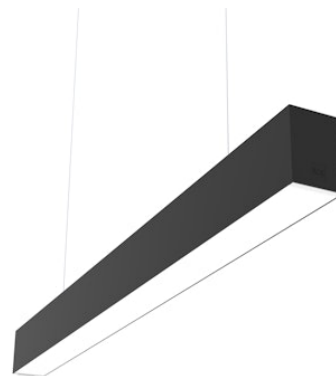

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Power (W)              | 20                  |
| Lumen Output (lm)      | 1893                |

### Physical

|                 |       |
|-----------------|-------|
| Colour          | Black |
| Trim            | No    |
| Orientation     | Fixed |
| Length (mm)     | 845   |
| Net weight (kg) | 4.30  |
| IP internal     | 20    |
| IP external     | 20    |

### Download

|                       |                       |
|-----------------------|-----------------------|
| Mounting instructions | <a href="#">↓ PDF</a> |
| Mounting instructions | <a href="#">↓ PDF</a> |

### Photometric Files


|           |                       |
|-----------|-----------------------|
| LDT / IES | <a href="#">↓ ZIP</a> |
|-----------|-----------------------|

### Technical Drawings

|    |                       |
|----|-----------------------|
| 2D | <a href="#">↓ ZIP</a> |
| 3D | <a href="#">↓ ZIP</a> |



Schematic light drawing



Photometric

|                        |            |
|------------------------|------------|
| Lighting type          | Direct     |
| Light distribution     | Asymmetric |
| CCT (K)                | 3000       |
| CRI>                   | 80         |
| Beam angle C0-180 (°)  | 102        |
| Beam angle C90-270 (°) | 106        |

Electrical

|                   |              |
|-------------------|--------------|
| Insulation class  | I            |
| Frequency (Hz)    | 50/60        |
| Power supply      | Integrated   |
| Dimmable          | No           |
| Power supply type | Non Dimmable |
| Emergency         | No           |

Notes

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. /  
Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

Accessories & Power Supply



OPTIONAL  
Accessory

08.0030

Suspension kit



OPTIONAL  
Accessory

08.0031.00

Power supply rose



OPTIONAL  
Accessory

08.9052.02

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour Anodized Grey)



OPTIONAL  
Accessory

08.9052.40

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour White)



OPTIONAL  
Accessory

08.9052.NS

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour Black)



OPTIONAL  
Accessory

08.0110.00

500 mm opal diffuser. Diffuse,  
glare free and uniform lighting  
throughout the room