


# FLOS

 N70UFC3U02B Anodized Grey

## In-Finity 70 Suspension Up & Down Flat Corner 3000K Micro-Prismatic Diffuser


Designed by FLOS Architectural, 2017

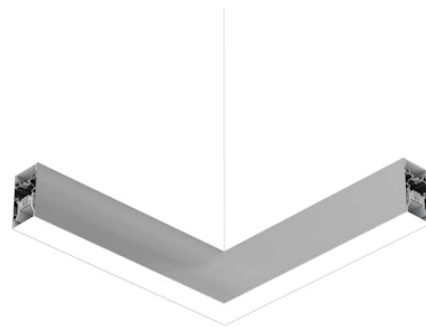

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	41
Lumen Output (lm)	2807

### Physical

Colour	Anodized Grey
Trim	No
Orientation	Fixed
Net weight (kg)	4.10
IP internal	20
IP external	20

### Download

Mounting instructions [↓ PDF](#)


### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Photometric

Lighting type	Indirect, Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	67
Beam angle C90-270 (°)	76
UGR <sub>L</sub>	<19

Electrical

Insulation class	I
Frequency (Hz)	50/60
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

Notes

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

Accessories & Power Supply



REQUIRED  
Accessory

08.0030

Suspension kit



REQUIRED  
Accessory

08.0031.00

Power supply rose



REQUIRED  
Accessory

08.9057.02

Metal cover. Suspension Up &  
Down. 70 mm (Colour Anodized  
Grey)



REQUIRED  
Accessory

08.9057.40

Metal cover. Suspension Up &  
Down. 70 mm (Colour White)



REQUIRED  
Accessory

08.9057.NS

Metal cover. Suspension Up &  
Down. 70 mm (Colour Black)



OPTIONAL  
Accessory

08.0110.00

500 mm opal diffuser. Diffuse,  
glare free and uniform lighting  
throughout the room