

FLOS

F018F32BU13 Pale Green

In Vitro Rod 2

Designed by Philippe Starck, 2020

855lm - 3000K - CRI> 80 - Beam° 111



Rod installation. Light source is included. Power supply ON/OFF or dimmable 100-127V is integrated within the ceiling base. Length: 290 mm.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8054793319841
Mounting	Suspension
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	Edge Lighting
Number of lamps	1
System power (W)	13
System flux (lm)	855

Physical

Color	Pale Green
Orientation	Fixed
Net weight (lb)	10.06
Package height (in)	11.02
Package width (in)	38.03
Package length (in)	11.02
Package volume (in)	4621.59
IP internal	66



Download


Family spec sheet [ZIP](#)
Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)



Ecodesign and Energy Labelling

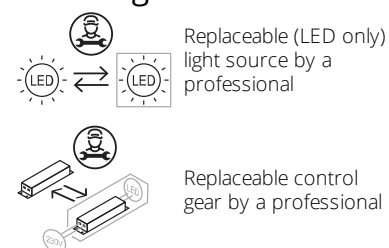

<https://professional.flos.com/en-US/us/product/in-vitro-rod-2-f018f32bu13/>


F018F32BU13

©2022 Flos - P.IVA 00290820174 - 11/27/2025

professional.flos.com | flos.outdoor@flos.com 1/2

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	111
Beam angle C90-270 (°)	111
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-127
Driver	Integrated
Dimmable	Yes
Dimming interface	Dimmer Integrated