

FLOS

05.7155.GL Gold

Kap Ø 105 Deep

Designed by FLOS Architectural, 2019


LED - LED array - 22.8W - 1731lm - 3000K - CRI> 90 - Beam° 16



Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	22.8
System power (W)	25.9
Source flux (lm)	2743
Lumen Output (lm)	1731
Efficacy (lm/W)	45

Physical

Colour	Gold
Trim	No
Orientation	Fixed
Recessed depth (mm)	190
Spot diameter (mm)	106
Length (mm)	106
Net weight (kg)	0.48
Package height (mm)	200
Package width (mm)	185
Package length (mm)	220
IP internal	20
IP external	54

Download

[Mounting instructions](#) [↓ PDF](#)

[Mounting instructions](#) [↓ PDF](#)

Photometric Files

[LDT / IES](#) [↓ ZIP](#)

Technical Drawings


[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Schematic light drawing



Beam Angle: 16°

h(m)	E(lx)	D(m)
1	14477	0.28
2	3619	0.57
3	1609	0.85
4	905	1.13
5	579	1.41

Luminous flux luminaire
1731 lm (EXTREME CUT OFF)


Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	16
Beam angle C90-270 (°)	16
UGR _L	<19

Electrical

Insulation class	III
Frequency (Hz)	0
Forward voltage (V)	34
LED current (mA)	650
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V

Ecodesign and Energy Labelling

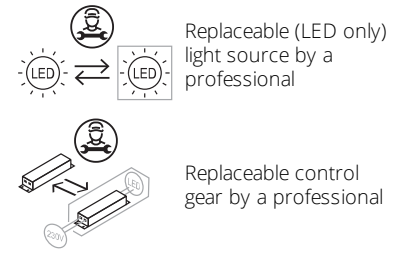

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9439

Continuous current power supply, 0/1-10V dimmable, 220/240V - 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700 / 750 / 800 / 900 / 950 / 1000 / 1050mA-36W



REQUIRED
Power supply

Electrical

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



REQUIRED
Power supply

Electrical

60.9692

30W, 220-240V - 50/60Hz
Constant current power supply, with dip-switch programmable power supply current.




REQUIRED
Power supply

Electrical

60.7709

Continuous current supply source of 220-240V - 50/60Hz with selectable current via switch. Dimmable Dali 1, Dali 2, push dimming. 150mA - 7.8W / 200mA - 10.4W / 250mA - 13W / 300mA - 15.6W / 350mA - 18.2W / 400mA - 20.8W / 450mA - 23.4W / 500mA - 26W /...

Max. \varnothing 150



REQUIRED
Frame

Installation

08.9104.00

Installation frame No Trim



REQUIRED
Power supply

Electrical

60.9207

Casambi continuous current
power supply, dimmable
220/240V - 50/60Hz, 300mA -
16W / 350mA - 18,5W / 400mA -
21,5W / 450 mA - 24W / 500mA -
27W / 600mA - 32W / 650 mA -
35W / 700 mA - 36W /750 /800
/900 /1000 /1050 /1200 mA -
38W.